

# ANKER SOLIX

LIVE IN POWER



Hotline: (AU) + 61 1800 929 112  
Email: [support@anker.com](mailto:support@anker.com)

Note: Product specifications and details are subject to change without notice.  
Refer to the Anker SOLIX official website for current and accurate information.

**ANKER**  
Innovations

# Anker SOLIX Introduction

Today, technology is integrated into our life from work to play, powering us on to maximize the way we live. But we are slowly losing the power to traditional grid power sources, depleting natural resources and causing sustainability issues, giving us no confidence to power the future on.

Anker SOLIX is here to take back the power with you. With intuitive solar and energy storage technology, giving you the reliable power to go on with the life you want.

You can enjoy all delicacies under the sun, or turn darkness into fun when the darkest hours come, if you feel like working wherever you please, or playing your heart out anywhere with ease. Choose to roam free to the wonders of the earth, or enjoy an evening in the woods with the ones you love. Create your haven with human-centric power that goes on forever, to empower future generations to live freely.

Whatever you choose in life, we are always there to ensure that you live in power.

**Anker SOLIX. Live In Power.**



# Anker SOLIX C300 Portable Power Station

288Wh | 300W

Travel Lightly, Power Mighty



**288Wh with  
7 Outlets**



**140W 2-Way  
Fast Charging**

**10 ms  
UPS**

**15% Smaller Than  
Industry Average**

## 4 Recharging Modes



140W PD USB-C



Outlet



100W Solar



Car Socket

**100W**

Solar Recharging



**3,000 Cycles**

**10-Year | 5-Year**  
Lifespan | Warranty




| **Anker SOLIX C300 Portable Power Station**




|                         |                       |
|-------------------------|-----------------------|
| Capacity                | 288Wh                 |
| Output Power            | 300W                  |
| Output Power (SurgePad) | 600W                  |
| Number of AC Ports      | 2                     |
| USB-A Output Power      | 1× 12W                |
| USB-C Output Power      | 2× 140W, 1× 15W       |
| Car Outlet Rated Power  | 1× 120W               |
| Maximum AC Input Power  | 330W                  |
| PD Input Power          | 1× 140W               |
| Solar Input Power       | 100W                  |
| Battery Cycles          | 3,000                 |
| Battery Type            | LFP                   |
| Warranty                | 5 Years               |
| UPS Switchover Time     | 10 ms                 |
| Dimensions (W × H × D)  | 164 × 161 × 240 mm    |
| Weight                  | 4.1 kg                |
| LCD Display             | Yes                   |
| Light                   | Built-In LED          |
| Smart App Control       | Yes (Bluetooth, WLAN) |

| **What's in the Box**


In the C300 Package



Anker SOLIX C300  
Portable Power Station



AC Charging Cable




Important Safety  
Instructions

# Anker SOLIX C300 DC Portable Power Station

288Wh (90,000mAh) | 300W

Massive Charge for All, On the Fly

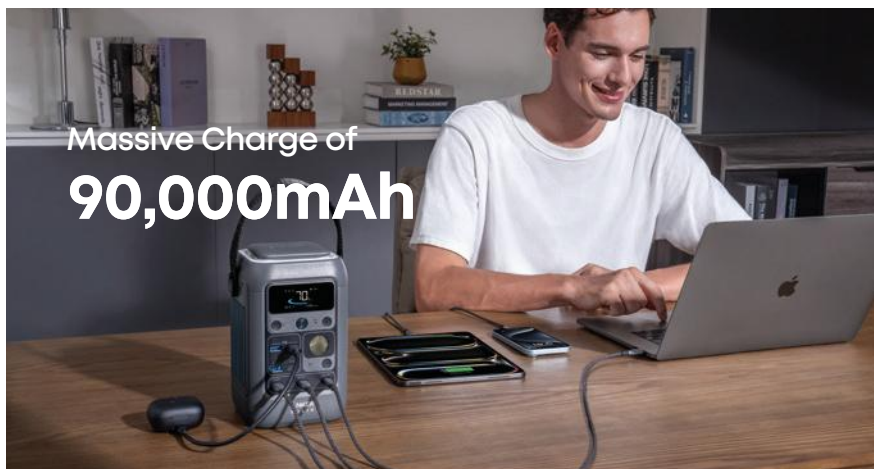

Massive Charge of  
**90,000mAh**




100W of Sustainable  
Solar Power



Long-Lasting Energy



**7 Ports with 300W**

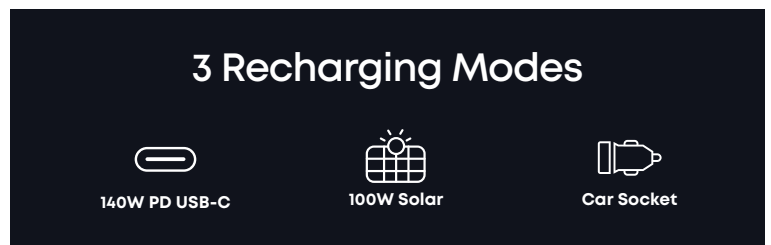

**3 Recharging Modes**

140W PD USB-C

100W Solar

Car Socket



**30% Smaller  
Than  
Industry  
Average**



**Built-In  
Lights**


| **Anker SOLIX C300 DC Portable Power Station**




|                         |                          |
|-------------------------|--------------------------|
| Capacity                | 288Wh (90,000mAh)        |
| Total Output Power      | 300W                     |
| Output Power (SurgePad) | /                        |
| Number of AC Ports      | /                        |
| USB-A Output Power      | 2× 12W                   |
| USB-C Output Power      | 1× 100W, 2× 140W, 1× 15W |
| Car Outlet Rated Power  | 1× 120W                  |
| Maximum AC Input Power  | /                        |
| PD Input Power          | 2× 140W                  |
| Solar Input Power       | 100W                     |
| Battery Cycles          | 3,000                    |
| Battery Type            | LFP                      |
| Warranty                | 3 Years                  |
| Dimensions (W × H × D)  | 124 × 120 × 200 mm       |
| Weight                  | 2.8 kg                   |
| LCD Display             | Yes                      |
| Light                   | Pop-Out, Expandable LED  |
| Smart App Control       | Yes (Bluetooth, WLAN)    |

| **What's in the Box**

In the C300 DC Package



Anker SOLIX C300 DC  
Portable Power Station



140W USB-C to USB-C  
Charging Cable



Important Safety  
Instructions



# Anker SOLIX C1000 Portable Power Station

1,056Wh | 1,800W

Full Speed to Go, Full Power to Last

**100% UltraFast  
Recharging  
in 58 Min\***

\*Activate UltraFast Mode in the Anker app.



Double the  
Capacity to  
**2,112Wh**



**9 Ports**



**SurgePad™**

Protection up to

是非 **2,400W** 大



Full Power  
in **1.8H**  
600W Solar Input



**3,000** Cycles  
LFP Batteries

**5** Times  
Longer Lifespan




| **Anker SOLIX C1000 Portable Power Station**




|                         |                       |
|-------------------------|-----------------------|
| Capacity                | 1,056Wh               |
| Output Power            | 1,800W                |
| Output Power (SurgePad) | 2,400W                |
| Number of AC Ports      | 4                     |
| USB-A Output Power      | 2× 12W                |
| USB-C Output Power      | 1× 30W, 1× 100W       |
| Car Outlet Rated Power  | 1× 120W               |
| Maximum AC Input Power  | 1,300W                |
| PD Input Power          | /                     |
| Solar Input Power       | 600W Max              |
| Battery Cycles          | 3,000                 |
| Battery Type            | LFP                   |
| Warranty                | 5 Years               |
| UPS Switchover Time     | 20 ms                 |
| Dimensions (W × H × D)  | 376 × 205 × 267 mm    |
| Weight                  | 12.9 kg               |
| LCD Display             | Yes                   |
| Light                   | Built-In LED          |
| Smart App Control       | Yes (Bluetooth, WLAN) |

| **What's in the Box**

In the C1000 Package



Anker SOLIX C1000 Portable Power Station




AC Charging Cable



DC Charging Cable



Important Information



Solar Panel Connector

# Anker SOLIX F2000 Portable Power Station

2,048Wh | 2,300W

Power Ready for Anything



1,000W  
Solar Input



Expandable Battery Up to  
**4,096Wh**



Ultra  
Portable Design




GaNPrime™

Anker's Most Intelligent  
Fast Charging System

InfiniPower™

- Premium LiFePO4 Batteries
- Industrial-Grade Components
- Unibody Drop-Proof Design
- Smart Temperature Control

2,300W | 2,048Wh  
**Power 99%  
of Appliances**

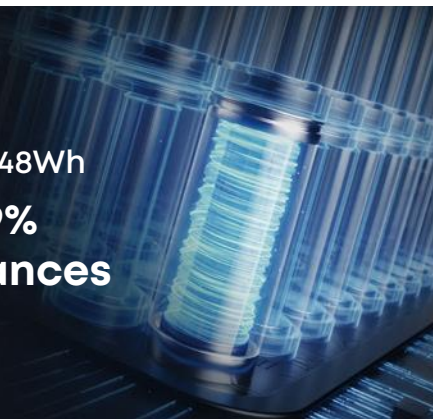

Power for  
Van Life



Monitor and Control  
via Smart App




| **Anker SOLIX F2000 Portable Power Station**



|                         |                       |
|-------------------------|-----------------------|
| Capacity                | 2,048Wh               |
| Output Power            | 2,300W                |
| Output Power (SurgePad) | 3,500W                |
| Number of AC Ports      | 3                     |
| USB-A Output Power      | 2× 12W                |
| USB-C Output Power      | 3× 100W               |
| Car Outlets Rated Power | 2× 120W               |
| Maximum AC Input Power  | 2,200W                |
| Solar Input Power       | 1,000W Max            |
| Battery Cycles          | 3,000                 |
| Battery Type            | LFP                   |
| Warranty                | 5 Years               |
| UPS Switchover Time     | 20 ms                 |
| Dimensions              | 525 × 250 × 395 mm    |
| Weight                  | 30.5 kg               |
| Power Saving Mode       | Yes                   |
| LCD Display             | Yes                   |
| Ambient Light Mode      | Yes                   |
| Smart App Control       | Yes (Bluetooth, WLAN) |

| **What's in the Box**


In the F2000 Package



Anker SOLIX F2000 Portable Power Station



Solar Charging Cable



AC Charging Cable



Car Charging Cable



User Manual

# Anker SOLIX F3000 Portable Power Station

3,072Wh | 3,600W

The Longest-lasting Essential Home Backup Power



## 1.5h Rapid Recharge with Free Solar

2,400W Dual-Voltage Solar Input



## 3kWh - 12kWh

Expandable Capacity



## Ultra-Low Idle Power Consumption

AC Idle  
Standby Time  
**125Hr**

Typical 190W  
Refrigerator Runtime  
**42Hr**



## Up to 6,000W

Multiple Ways to Recharge



## AC Output Massive 3,600W

SurgePad™ Power

**4,500W**

AC Surge Power

**7,200W**



## Versatile Power for RV Travel

**30A** Anderson  
DC Output



InfiniPower™

**4,000-Cycle** **10-Year**  
LFP Battery Lifespan



## Charge EVs Directly 2,300W



\*Requires additional accessories

## 5 Ways to Recharge



AC + Solar



EV Charging  
Station



AC Outlet



Solar



Alternator  
Charger


## | Anker SOLIX F3000 Portable Power Station



|                         |                                                         |
|-------------------------|---------------------------------------------------------|
| Rated Capacity          | 51.2VDC 60,000mAh / 3,072Wh                             |
| AC Input (Wall Charger) | 230V~ 10A Max, 2,300W Max, 50Hz                         |
| AC Input (EV Charger)   | 230V~ 18A Max, 3,600W Max, 50Hz                         |
| High-PV Input           | 11-165V~17A Max (1,600W Max)                            |
| Low-PV Input            | 11-60V ~ 17A Max (800W Max)                             |
| USB-C Output            | 5V~3A/ 9V~3A/ 15V~3A/ 20V~3A/ 20V~5A (100W MaxPer Port) |
| USB-A Output            | 5V~2.4A (12W Max Per Port)                              |
| AC Output               | 230V~ 10A Max, 2,300W Max, Total Power 3,600W, 50Hz     |
| AC Output (Bypass)      | 230V~ 9.8A Max, 2,254W Max, Total Power 2,254W, 50Hz    |
| Car Charger Output      | 12V~10A                                                 |
| DC Output               | 13.4V~30A                                               |
| Discharging Temperature | -20°C to 40°C                                           |
| Charging Temperature    | 0°C to 40°C                                             |
| Net Weight              | 41.5 kg                                                 |
| Dimensions (W × H × D)  | 651 × 300 × 377 mm                                      |
| UPS Switchover Time     | 20 ms                                                   |
| Warranty                | 5 Years                                                 |

## | What's in the Box

### In the F3000 Package



Anker SOLIX F3000  
Portable Power Station



AC Charging Cable




High-Voltage Solar  
Charging Cable




Documents

### In the Expansion Battery Box (Sold Separately)



Anker SOLIX BP3000  
Expansion Battery



Battery-to-Host Cable



Documents

# Anker SOLIX F3800 Portable Power Station

3,840Wh | 6,000W

Minimum Effort, Maximum Power



red dot winner 2024



**3.8kWh to 26.9kWh**  
(Per Power Station) (With 6 Expansion Batteries)

Power All Home Devices

**6,000W**



**More Fast-Charging Options**



Grid (2,300W)



Portable Solar  
Panels (2,400W)

**Long-Lasting  
Power**



**Directly  
Powers RVs**

230V/10A | 2300W



**Directly  
Charges EVs**

2,300W




| **Anker SOLIX F3800 Portable Power Station**




|                        |                       |
|------------------------|-----------------------|
| Capacity               | 3,840Wh               |
| Output Power           | 6,000Wh               |
| Number of AC Ports     | 6                     |
| USB-A Output Power     | 2× 12W                |
| USB-C Output Power     | 3× 100W               |
| Car Outlet Rated Power | 1× 120W               |
| Maximum AC Input Power | 2,300W                |
| Solar Input Power      | 2,400W Max            |
| Battery Cycles         | 3,000                 |
| Battery Type           | LFP                   |
| Warranty               | 5 Years               |
| UPS Switchover Time    | 20 ms                 |
| Dimensions (W × H × D) | 702 × 388 × 395 mm    |
| Weight                 | 60 kg                 |
| LCD Display            | Yes                   |
| Ambient Light Mode     | Yes                   |
| Smart App Control      | Yes (Bluetooth, WLAN) |

| **What's in the Box**


In the F3800 Package

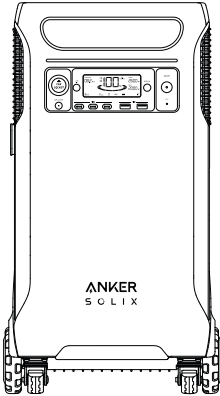


Anker SOLIX F3800  
Portable Power Station



AC Charging Cable



Solar Charging Connector



Solar to XT60  
Charging Cable



Important Information & User  
Manual & Warranty Card

# Anker SOLIX Alternator Charger

Power Your Life, Charge on the Go



## Charge in Three Flexible Ways



UltraFast  
PPS  
Charging



Seamless  
RV  
Expansion



Efficient  
Vehicle Battery  
Recharge



## UltraFast Alternator Charging

1 kWh  
Power Station | **1.8 Hr**



## Extra 12kWh Capacity for RV



Compatible with  
**99%** of Vehicle and  
RV Batteries.



| Anker SOLIX Alternator Charger




|                                       |                                                                                                                                                                                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Charging Watt                         | 800W Max.                                                                                                                                                                                |
| Charging Mode Input/Output            | 11V-28.8V, 80A Max., 800W Max.                                                                                                                                                           |
| Reverse Charging Mode Input/Output    | 11V-60V, 25A Max., 800W Max.                                                                                                                                                             |
| RV Battery Charging Mode Input/Output | 11V-60V, 25A Max., 800W Max.                                                                                                                                                             |
| Wi-Fi                                 | Frequency: 2,400MHz-2,483.5MHz, Maximum output power: <20dBm                                                                                                                             |
| Bluetooth                             | Frequency: 2,402MHz-2,480MHz, Maximum output power: <6dBm                                                                                                                                |
| XT 60/XT 60i Port                     | Anker SOLIX C1000 Portable Power Station<br>Anker SOLIX C1000 Gen 2 Portable Power Station<br>Anker SOLIX F3000 Portable Power Station<br>Anker SOLIX C2000 Gen 2 Portable Power Station |
| New Expansion Port                    | Anker SOLIX F3000 Portable Power Station<br>Anker SOLIX C2000 Gen 2 Portable Power Station                                                                                               |
| Battery Voltage                       | 12V/24V                                                                                                                                                                                  |
| Battery Type                          | FLD, GEL, AGM, Calcium lead-acid batteries, and LFP batteries                                                                                                                            |
| Dimensions                            | 218 × 119 × 68 mm                                                                                                                                                                        |
| Net Weight                            | 1.3kg                                                                                                                                                                                    |
| Warranty                              | 2 Years                                                                                                                                                                                  |

| What's in the Box


In the Alternator Charger Package




Anker SOLIX  
Alternator Charger




Battery Connection Cable  
(7 m)



PPS XT-60i Port  
Connection Cable (1 m)



Installation Board



Screw (x6)




User Manual

# Anker SOLIX V1

## Smart EV Charger

Effortless Charging, Big Savings



Anker Intelligence,  
Maximum Savings





Swipe to Charge,  
Instant Start



All Weather Reliability  
with IP65 and C5



|                                   |                                                                                    |                      |
|-----------------------------------|------------------------------------------------------------------------------------|----------------------|
|                                   | Cable Version                                                                      |                      |
| Product Type                      |  |                      |
| Inputs and Outputs                |                                                                                    |                      |
| Rated Power                       | 7.4kW                                                                              | 22kW                 |
| Nominal Voltage                   | 230V ± 20% (1P+N+PE)                                                               | 400V ± 20% (3P+N+PE) |
| Nominal Current                   | 32A                                                                                | 32A                  |
| Frequency                         | 50Hz                                                                               |                      |
| Vehicle Connection                | Type 2                                                                             |                      |
| Cable Length                      | 7 m                                                                                |                      |
| Cross-Sectional                   | 3 × 6 mm²                                                                          | 5 × 6 mm²            |
| Network Types                     | TN, TT                                                                             |                      |
| User Interface and Communications |                                                                                    |                      |
| Protocol                          | OCPP 1.6J                                                                          |                      |
| Communication                     | Wi-Fi, Ethernet, Bluetooth, RS485                                                  |                      |
| Charger Status Information        | RGB LED and App                                                                    |                      |
| Authentication                    | RFID, App, Bluetooth                                                               |                      |
| Operational Modes                 | Auto Start, Schedule Charging, Smart Charging                                      |                      |
| Charging Modes                    | Solar Only Mode, Solar & Grid Mode                                                 |                      |
| Load Balance Mode                 | Combine with Anker SOLIX Smart meter or Shelly meter                               |                      |
| Protection                        |                                                                                    |                      |
| Residual Current Detection        | DC 6mA                                                                             |                      |
| RCD                               | External RCD Type A (30mA) required, in accordance with local regulations          |                      |
| Fire Rating                       | UL94                                                                               |                      |
| Overcurrent protection            | Yes                                                                                |                      |
| Over-Temperature protection       | Yes                                                                                |                      |
| General Specifications            |                                                                                    |                      |
| Operating Temperature             | -30°C to 50°C                                                                      |                      |
| Application Environment           | Outdoor/Indoor                                                                     |                      |
| Relative Humidity                 | 5% to 95% (Non-Condensing)                                                         |                      |
| Operating Altitude                | 2,000 m                                                                            |                      |
| Dimensions (W × H × D)            | 211 × 360 × 120 mm                                                                 |                      |
| Weight                            | 5.45 kg                                                                            | 5.88 kg              |
| Mounting Options                  | Cement/Wooden Walls                                                                |                      |
| IP Rating                         | IP65                                                                               |                      |
| Impact Protection                 | IK10                                                                               |                      |
| Noise                             | 30 dB                                                                              |                      |
| Warranty                          | 3 Years Limited                                                                    |                      |
| Product Lifespan                  | 8 Years                                                                            |                      |
| Accessories                       |                                                                                    |                      |
| Standard Accessories              | Ev charger holster, RFID Card*1                                                    |                      |
| Optional Accessories              | RFID Card, Anker SOLIX Smart Meter                                                 |                      |

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| Charger Body<br>Type 2 Charging Cable                                              | Wire Box                                                                            | EV Charger Holster                                                                  | 1x RFID Card                                                                         | Anker SOLIX Smart Meter (Optional)                                                    | CEE Plug (Optional)<br>32A-1phase, 16A-3phase,<br>32A-3phase                          |

# Anker SOLIX EverFrost 2 58L Electric Cooler

Cooling Ever Faster, Ever Longer



## Dual<sup>1</sup> 288Wh Batteries

Long-Lasting  
Cooling 3.2 Days



## 15 Min Fast Cooling

25°C to 0°C

## Even Cooling $\pm 1.2^{\circ}\text{C}$

Temperature  
Variance



## Smart App Control



## No Ice, No Mess, Just Storage



$-20^{\circ}\text{C}$  to  $20^{\circ}\text{C}$

Freeze or Cool



## 4 Ways to Recharge



Car  
Outlet



Solar  
Panel



Wall  
Outlet



USB-C  
Port

## EasyTow™ Suitcase Design



## Dual-Zone Design



<sup>1</sup>Only one battery included. Second battery sold separately.

## | Anker SOLIX EverFrost 2 Electric Cooler



| Product Name                        | Anker SOLIX EverFrost 2<br>40L Electric Cooler                                                                          | Anker SOLIX EverFrost 2<br>58L Electric Cooler                                                                          | Anker SOLIX EverFrost 2<br>Removable Battery |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| Basic Info                          |                                                                                                                         |                                                                                                                         |                                              |
| Capacity                            | 40L                                                                                                                     | 58L                                                                                                                     | /                                            |
| Cooler Compartments                 | 1                                                                                                                       | 2 (Dual Zone)                                                                                                           | /                                            |
| Temperature Range                   | -20°C to 20°C                                                                                                           | -20°C to 20°C                                                                                                           | /                                            |
| FrostFlow™ Technology               | Yes                                                                                                                     | Yes                                                                                                                     | /                                            |
| Max Cooling Speed <sup>1</sup>      | 18 min (Eco/Smart Mode)<br>15 min (Max Mode)                                                                            | 29 min (Max Mode for Both Zones)<br>13 min (Max Mode for Single Zone)                                                   | /                                            |
| Max Runtime <sup>2</sup>            | 104 Hr (Eco Mode with Dual Batteries)<br>52 Hr (Eco Mode with Single Battery)                                           | 78 Hr (Eco Mode with Dual Batteries)<br>39 Hr (Eco Mode with Single Battery)                                            | /                                            |
| Battery Capacity                    | 288Wh                                                                                                                   | 288Wh                                                                                                                   | 288Wh                                        |
| Battery Compartments                | 2 (Dual Batteries)                                                                                                      | 2 (Dual Batteries)                                                                                                      | /                                            |
| Warranty                            | 3 Years                                                                                                                 | 3 Years                                                                                                                 | 3 Years                                      |
| Input                               |                                                                                                                         |                                                                                                                         |                                              |
| Adapter Input                       | 95W                                                                                                                     | 95W                                                                                                                     | 95W                                          |
| Car Socket Input                    | 95W                                                                                                                     | 95W                                                                                                                     | 95W                                          |
| Solar Input                         | 12-30V (100W Max)                                                                                                       | 12-30V (100W Max)                                                                                                       | /                                            |
| USB-C Powered                       | 60W                                                                                                                     | 60W                                                                                                                     | 60W                                          |
| Recharging Time<br>(Single Battery) | 95W Adapter: 3.6 Hr<br>95W Car Charger: 3.6 Hr<br>100W Solar Input: 3.6 Hr<br>60W USB-C: 5.5 Hr                         | 95W Adapter: 3.6 Hr<br>95W Car Charger: 3.6 Hr<br>100W Solar Input: 3.6 Hr<br>60W USB-C: 5.5 Hr                         | 60W USB-C: 5.5 Hr                            |
| Output                              |                                                                                                                         |                                                                                                                         |                                              |
| USB-A Output                        | 1× 12W                                                                                                                  | 1× 12W                                                                                                                  | 1× 12W                                       |
| USB-C Output                        | 1× 60W                                                                                                                  | 1× 60W                                                                                                                  | 1× 60W                                       |
| Weight and Dimensions               |                                                                                                                         |                                                                                                                         |                                              |
| Dimensions                          | 749 × 459 × 493 mm                                                                                                      | 986 × 459 × 493 mm                                                                                                      | 161 × 111 × 130 mm                           |
| Product Weight with Battery         | 25.5 kg                                                                                                                 | 33.9 kg (with Dual Batteries)<br>31.4 kg (with Single Battery)                                                          | 2.5 kg                                       |
| Product Weight without Battery      | 23 kg                                                                                                                   | 28.9 kg                                                                                                                 | /                                            |
| What's in the Box                   |                                                                                                                         |                                                                                                                         |                                              |
| What's in the Box                   | AC Adapter and Charging Cable, Car Charging Cable, Wheel Holder, Battery Compartment Drawer, Safety, QSG, Warranty Card | AC Adapter and Charging Cable, Car Charging Cable, Wheel Holder, Battery Compartment Drawer, Safety, QSG, Warranty Card | Safety, Warranty Card                        |

Product specifications and details are subject to change without notice. Refer to the Anker SOLIX official website for current and accurate information.


<sup>1</sup>Amount of time required for cooler to reach 0°C from 25°C with single storage compartment under Anker laboratory conditions. The 15-minute Max Mode is limited to a single temperature zone.

<sup>2</sup>Results determined under Anker laboratory conditions with ambient temperature of 25°C and internal cooler temperature of 4°C.

# Anker SOLIX Portable Solar Panel




**1.5× Higher Energy  
Conversion  
Efficiency**

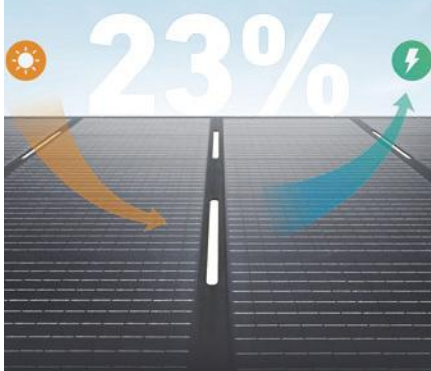


**IP67 Waterproof**



**4 Set Angles for  
Max Sunlight  
Absorption**



**Highly  
Durable  
Long-Lasting  
Surface**

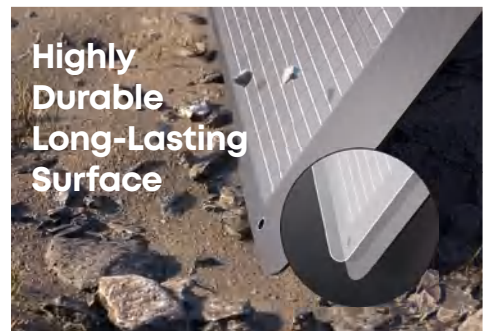

## | Anker SOLIX Portable Solar Panel



**Anker SOLIX PS100**



**Anker SOLIX PS200**



**Anker SOLIX PS400**

|                       |                                                                                                                                                  |                                                                                                                                              |                                                                                                                                             |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Output Power  | 100W                                                                                                                                             | 200W                                                                                                                                         | 400W                                                                                                                                        |
| Type of Solar Panel   | Monocrystalline                                                                                                                                  | Monocrystalline                                                                                                                              | Monocrystalline                                                                                                                             |
| Output Port           | MC4                                                                                                                                              | MC4                                                                                                                                          | MC4                                                                                                                                         |
| Open-Circuit Voltage  | 28.5V                                                                                                                                            | 57.6V                                                                                                                                        | 57.6V                                                                                                                                       |
| Operating Current     | 4.1A                                                                                                                                             | 4.16A                                                                                                                                        | 8.33A                                                                                                                                       |
| Operating Voltage     | 24.5V                                                                                                                                            | 48V                                                                                                                                          | 48V                                                                                                                                         |
| Operating Temperature | -20°C to 60°C                                                                                                                                    | -20°C to 60°C                                                                                                                                | -20°C to 60°C                                                                                                                               |
| Protection Rating     | IP67                                                                                                                                             | IP67                                                                                                                                         | IP67                                                                                                                                        |
| Dimensions (Folded)   | 557 × 608 × 47 mm                                                                                                                                | 557 × 608 × 50 mm                                                                                                                            | 990 × 657 × 50 mm                                                                                                                           |
| Dimensions (Unfolded) | 1,120 × 608 × 30 mm                                                                                                                              | 2,084 × 608 × 28 mm                                                                                                                          | 2,540 × 990 × 30 mm                                                                                                                         |
| Weight                | 4.74 kg                                                                                                                                          | 7.84 kg                                                                                                                                      | 16.12 kg                                                                                                                                    |
| Warranty              | 2 Years                                                                                                                                          | 2 Years                                                                                                                                      | 2 Years                                                                                                                                     |
| What's In the Box     | Anker SOLIX PS100 Solar Panel, solar charging cable, XT-60 to DC7909 connector, welcome guide, 18-month warranty, and friendly customer service. | Anker SOLIX PS200 Solar Panel, 2x 9.8 ft (3 m) MC4 solar charging cable, 1.6 ft (0.5 m) MC4 to XT-60 solar charging cable and safety manual. | Anker SOLIX PS400 Solar Panel, 2x 9.8ft (3 m) MC4 solar charging cable, 1.6 ft (0.5 m) MC4 to XT-60 solar charging cable and safety manual. |