

冷压端头系列

Section B

TERMINAL & CONNECTOR SERIES



圆型预绝缘端头 INSULATED RING TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22~16) 最大电流 : I_{max}=19A

Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}:19A



型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
RV1.25-3	#4	3.2	5.7	18.4	4.95	10.4	4.3	红 Red
RVS1.25-3.5	#6	3.7	5.7	18.5	4.95			
RVM1.25-3.5	#6	3.7	6.5	20.7	6.3			
RVL1.25-3.5	#6	3.7	8.0	21.5	7.0			
RVS1.25-4	#8	4.3	6.5	20.7	6.3			
RVL1.25-4	#8	4.3	8.0	21.2	7.2			
RVS1.25-5	#10	5.3	8.1	21.8	7.3			
RVL1.25-5	#10	5.3	10.4	27.2	11.3			
RV1.25-6	1/4	6.5	10.4	25.3	10.3			
RV1.25-8	5/16	8.42	11.7	27.6	11.1			
RV1.25-10	3/8	10.5	13.8	30.2	13.2			
RV1.25-12	1/2	13.0	19.2	36.0	16.5			

导线截面 : 1.5-2.5mm²(美国线规 16~14) 最大电流 : I_{max}=27A

Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}:27A

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
RV2-3	#4	3.2	6.8	18.9	4.4	10.4	4.9	蓝 Blue
RVS2-3.5	#6	3.7	6.7	17.8	4.3			
RVM2-3.5	#6	3.7	7.5	21.0	7.0			
RVL2-3.5	#6	3.7	8.6	22.5	7.75			
RVS2-4	#8	4.3	6.7	19.9	6.2			
RVL2-4	#8	4.3	8.6	23.1	8.5			
RVS2-5	#10	5.3	8.6	23.0	8.4			
RVL2-5	#10	5.3	9.3	23.1	8.3			
RV2-6	1/4	6.5	10.4	25.2	10.0			
RV2-8	5/16	8.4	11.7	27.8	12.0			
RV2-10	3/8	10.5	13.8	30.5	13.5			
RV2-12	1/2	13.0	19.2	36.0	16.5			

导线截面 : 2.5-4mm²(美国线规 14~12) 最大电流 : I_{max}=37A


Wire range: 2.5-4mm²/14-12A.W.G. I_{max}: 37A

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
RV3.5-4	#8	4.3	8.1	26.3	8.7	13.8	6.0	黑 Black
RVS3.5-5	#10	5.3	8.0	25.4	8.7			
RVL3.5-5	#10	5.3	11.0	27.8	8.3			
RV3.5-6	1/4	6.5	11.0	27.8	8.3			
RV3.5-8	5/16	8.4	15.0	34.5	13.4			
RV3.5-10	3/8	10.5	15.0	34.5	13.4			
RV3.5-12	1/2	13.0	19.2	36.0	16.5			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A

Wire range: 4-6mm²/12-10A.W.G. I_{max}: 48A

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
RV5.5-3.5	#6	3.7	7.6	22.6	5.9	13.4	6.7	黄 Yellow
RVS5.5-4	#8	4.3	7.3	22.6	5.9			
RVL5.5-4	#8	4.3	8.8	27.0	8.7			
RV5.5-5	#10	5.3	8.8	27.0	8.7			
RV5.5-6	1/4	6.5	11.2	31.3	10.8			
RV5.5-8	5/16	8.4	13.5	34.7	13.7			
RV5.5-10	3/8	10.5	15.1	35.4	14.5			
RV5.5-12	1/2	13.0	19.3	38.9	15.3			

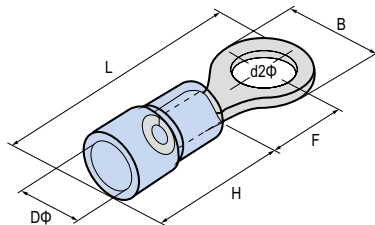

圆形裸端头 NON-INSULATED RING TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22~16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度 : 0.75mmWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}:19A Material: Copper Thickness: 0.75mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB1.25-3	#4	3.2	5.7	12.6	4.95	5.0	3.4	1.7
RNBS1.25-3.5	#6	3.7	5.7	12.6	4.95			
RNBM1.25-3.5	#6	3.7	6.5	14.4	6.3			
RNBL1.25-3.5	#6	3.7	8.0	15.8	7.0			
RNBS1.25-4	#8	4.3	6.5	14.4	6.3			
RNBL1.25-4	#8	4.3	8.0	15.8	7.2			
RNBS1.25-5	#10	5.3	8.1	15.8	7.3			
RNBL1.25-5	#10	5.3	10.4	17.6	11.3			
RNB1.25-6	1/4	6.5	10.4	21.8	10.3			
RNB1.25-8	5/16	8.42	11.7	21.8	11.1			
RNB1.25-10	3/8	10.5	13.8	25.5	13.2			
RNB1.25-12	1/2	13.0	19.2	30.4	16.5			

导线截面 : 1.5-2.5mm²(美国线规 16~14) 最大电流 : I_{max}=27A 材质: 紫铜 材料厚度 : 0.8mmWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Thickness: 0.8mm


型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB2-3	#4	3.2	6.6	13.0	4.3	5.0	4.1	2.3
RNBS2-3.5	#6	3.7	6.6	13.0	4.3			
RNBM2-3.5	#6	3.7	6.6	14.6	7.0			
RNBL2-3.5	#6	3.7	8.5	16.6	7.75			
RNBS2-4	#8	4.3	6.6	16.0	7.0			
RNBL2-4	#8	4.3	8.5	16.8	7.75			
RNBS2-5	#10	5.3	8.5	16.8	7.75			
RNBL2-5	#10	5.3	9.5	16.8	7.25			
RNB2-6	1/4	6.5	12.0	21.8	11.0			
RNB2-8	5/16	8.4	12.0	21.8	11.0			
RNB2-10	3/8	10.5	13.6	25.5	13.9			
RNB2-12	1/2	13.0	19.2	30.6	16.5			

导线截面 : 2.5-4mm²(美国线规 14~12) 最大电流 : I_{max}=37A 材质: 紫铜 材料厚度 : 1.0mmWire range: 2.5-4mm²/14-12A.W.G. I_{max}: 37A Material: Copper Thickness: 1.0mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB3.5-4	#8	4.3	8.0	18.0	7.7	6.0	5.0	3.0
RNBS3.5-5	#10	5.3	8.0	18.0	7.7			
RNBL3.5-5	#10	5.3	12.0	21.4	9.4			
RNB3.5-6	1/4	6.5	12.0	21.4	9.4			
RNB3.5-8	5/16	8.4	15.0	27.0	13.4	6.6	6.0	3.0
RNB3.5-10	3/8	10.5	15.0	27.0	13.4	6.0		

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜 材料厚度 : 1.0mmWire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Thickness: 1.0mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB5.5-3.5	#6	3.7	7.2	15.7	5.9	7.0	5.4	3.4
RNBS5.5-4	#8	4.3	7.2	15.7	5.9			
RNBL5.5-4	#8	4.3	9.5	19.8	8.3			
RNB5.5-5	#10	5.3	9.5	19.8	8.3			
RNB5.5-6	1/4	6.4	12.0	25.8	13.0			
RNB5.5-8	5/16	8.4	15.0	28.0	13.7			
RNB5.5-10	3/8	10.5	15.0	28.0	13.7			
RNB5.5-12	1/2	13.0	19.2	32.4	16.0			



圆形裸端头 NON-INSULATED RING TERMINAL

导线截面 : 6-10mm²(美国线规 8) 最大电流 : I_{max}=62A 材质: 紫铜 材料厚度 : 1.2mmWire range: 6-10mm²/8A.W.G. I_{max}: 62A Material: Copper Thickness: 1.2mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB8-4	#8	4.3	8.8	23.8	9.3	8.5	7.2	4.5
RNBS8-5	#10	5.3	8.8	23.8	11.1			
RNBM8-5	#10	5.3	12.0	23.8	9.3			
RNBL8-5	#10	5.3	15.0	29.8	13.8			
RNBS8-6	1/4	6.4	12.0	23.8	9.3			
RNBL8-6	1/4	6.4	15.0	29.8	13.8			
RNB8-8	5/16	8.4	15.0	29.8	13.8			
RNB8-10	3/8	10.5	15.0	29.8	13.8			
RNB8-12	1/2	13.0	20.0	33.5	15.0			

导线截面 : 10-16mm²(美国线规 6) 最大电流 : I_{max}=88A 材质: 紫铜 材料厚度 : 1.4mmWire range: 10-16mm²/6A.W.G. I_{max}: 88A Material: Copper Thickness: 1.4mm


型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB14-4	#8	4.3	12.0	29.8	13.3	10.5	9.0	5.8
RNB14-5	#10	5.3	12.0	29.8	13.3			
RNBS14-6	1/4	6.4	12.0	29.8	13.3			
RNBL14-6	1/4	6.4	16.0	32.8	13.3			
RNB14-8	5/16	8.4	16.0	32.8	14.5			
RNB14-10	3/8	10.5	16.0	32.8	14.5			
RNB14-12	1/2	13.0	22.0	41.0	19.5			

导线截面 : 16-25mm²(美国线规 2) 最大电流 : I_{max}=115A 材质: 紫铜 材料厚度 : 1.7mmWire range: 16-25mm²/2A.W.G. I_{max}: 115A Material: Copper Thickness: 1.7mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNBS 22-5	#10	5.3	12.2	33.2	14.5	12.0	11.5	7.7
RNBL 22-5	#10	5.3	16.5	33.7	13.5			
RNBS 22-6	1/4	6.4	12.2	33.7	14.5			
RNBL 22-6	1/4	6.4	16.5	33.7	13.5			
RNB 22-8	5/16	8.4	16.5	33.7	13.5			
RNB 22-10	3/8	10.5	16.5	33.7	13.5			
RNB 22-11	7/16	11.5	22.0	42.5	19.5			
RNB 22-12	1/2	13.0	22.0	42.5	19.5			

导线截面 : 35-50mm²(美国线规 2) 最大电流 : I_{max}=160A 材质: 紫铜 材料厚度 : 1.8mmWire range: 35-50mm²/2A.W.G. I_{max}: 160A Material: Copper Thickness: 1.8mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 38-5	#10	5.3	15.3	39.0	18.3	14.0	13.3	9.4
RNB 38-6	1/4	6.4	15.3	39.0	18.3			
RNBS 38-8	5/16	8.4	15.3	39.0	18.3			
RNBL 38-8	5/16	8.4	22.0	42.7	17.7			
RNBS 38-10	3/8	10.5	15.3	39.0	18.3			
RNBL 38-10	3/8	10.5	22.0	42.7	17.7			
RNB 38-11	7/16	11.5	22.0	42.7	17.7			
RNB 38-12	1/2	13.0	22.0	42.7	17.7			



圆形裸端头 NON-INSULATED RING TERMINAL

导线截面 : 50-70mm²(美国线规 1/0) 最大电流 : I_{max}=215A 材质: 紫铜 材料厚度 : 1.8mmWire range: 50-70mm²/1/0A.W.G. I_{max}: 215A Material: Copper Thickness: 1.8mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 60-6	1 /4	6.4	22.0	49.7	20.7	18.0	15.4	11.4
RNB 60-8	5/16	8.4						
RNB 60-10	3/8	10.5						
RNB 60-11	7/16	11.5						
RNB 60-12	1 /2	13.0						
RNB 60-14	9/16	15.0	32.0	57.5	23.5	18.0	15.4	11.4
RNB 60-16	5/8	17.0						
RNB 60-18	11/16	19.0						
RNB 60-20	3 /4	21.0						
RNB 60-22	7/8	23.0						

导线截面 : 70-95mm²(美国线规 2/0) 最大电流 : I_{max}=235A 材质: 紫铜 材料厚度 : 1.9mmWire range: 70-95mm²/2/0A.W.G. I_{max}: 235A Material: Copper Thickness: 1.9mm


型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 70-6	1 /4	6.4	24.0	51.0	20.0	19.0	17.5	13.3
RNB 70-8	5/16	8.4						
RNB 70-10	3/8	10.5						
RNB 70-11	7/16	11.5						
RNB 70-12	1 /2	13.0						
RNB 70-14	9/16	15.0	32.0	61.0	26.0	19.0	17.5	13.3
RNB 70-16	5/8	17.0						
RNB 70-18	11/16	19.0						
RNB 70-20	3 /4	21.0						
RNB 70-22	7/8	23.0						

导线截面 : 95-120mm²(美国线规 3/0) 最大电流 : I_{max}=255A 材质: 紫铜 材料厚度 : 2.2mmWire range: 95-120mm²/3/0A.W.G. I_{max}: 255A Material: Copper Thickness: 2.2mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 80-6	1 /4	6.4	27.0	54.2	20.7	20.0	19.5	14.5
RNB 80-8	5/16	8.4						
RNB 80-10	3/8	10.5						
RNB 80-11	7/16	11.5						
RNB 80-12	1 /2	13.0						
RNB 80-14	9/16	15.0	32.0	68.0	32.0	20.0	19.5	14.5
RNB 80-16	5/8	17.0						
RNB 80-18	11/16	19.0						
RNB 80-20	3 /4	21.0						
RNB 80-22	7/8	23.0						

导线截面 : 120-150mm²(美国线规 4/0) 最大电流 : I_{max}=300A 材质: 紫铜 材料厚度 : 2.6mmWire range: 120-150mm²/4/0A.W.G. I_{max}: 300A Material: Copper Thickness: 2.6mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 100-6	1 /4	6.4	28.5	55.6	20.4	21.0	22.1	16.4
RNB 100-8	5/16	8.4						
RNB 100-10	3/8	10.5						
RNB 100-11	7/16	11.5						
RNB 100-12	1 /2	13.0						
RNB 100-14	9/16	15.0	32.0	69.0	32.0	21.0	22.1	16.4
RNB 100-16	5/8	17.0						
RNB 100-18	11/16	19.0						
RNB 100-20	3 /4	21.0						
RNB 100-22	7/8	23.0						



圆形裸端头 NON-INSULATED RING TERMINAL

导线截面 : 150-185mm²(美国线规 250/300MCM) 最大电流 : I_{max}=395A 材质: 紫铜 材料厚度 : 3.2mm

Wire range: 150-185mm²/250/300MCM A.W.G. I_{max}: 395A Material: Copper Thickness: 3.2mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 150-8	5/16	8.4	36.0	66.0	23.0	27.0	26.6	19.5
RNB 150-10	3/8	10.5						
RNB 150-11	7/16	11.5						
RNB 150-12	1 /2	13.0						
RNB 150-14	9/16	15.0						
RNB 150-16	5/8	17.0	36.0	81.0	36.0	27.0	26.6	19.5
RNB 150-18	11/16	19.0						
RNB 150-20	3 /4	21.0						
RNB 150-22	7/8	23.0						
RNB 150-24	15/16	25.0						
RNB 150-27	1	28.0						

导线截面 : 185-240mm²(美国线规 300/350MCM) 最大电流 : I_{max}=440A 材质: 紫铜 材料厚度 : 3.5mm

Wire range: 185-240mm²/300/350MCM A.W.G. I_{max}: 440A Material: Copper Thickness: 3.5mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 180-8	5/16	8.4	38.5	69.0	24.5	28.5	28.6	21.0
RNB 180-10	3/8	10.5						
RNB 180-11	7/16	11.5						
RNB 180-12	1 /2	13.0						
RNB 180-14	9/16	15.0						
RNB 180-16	5/8	17.0	38.5	86.6	39.0	28.5	28.6	21.0
RNB 180-18	11/16	19.0						
RNB 180-20	3 /4	21.0						
RNB 180-22	7/8	23.0						
RNB 180-24	15/16	25.0						
RNB 180-27	1	28.0						

导线截面 : 240-300mm²(美国线规 400/500MCM) 最大电流 : I_{max}=470A 材质: 紫铜 材料厚度 : 3.9mm


Wire range: 240-300mm²/400/500MCM A.W.G. I_{max}: 470A Material: Copper Thickness: 3.9mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 200-8	5/16	8.4	44.0	72.0	24.5	31.5	32.6	24.0
RNB 200-10	3/8	10.5						
RNB 200-11	7/16	11.5						
RNB 200-12	1 /2	13.0						
RNB 200-14	9/16	15.0						
RNB 200-16	5/8	17.0	44.0	91.0	37.5	31.5	32.6	24.0
RNB 200-18	11/16	19.0						
RNB 200-20	3 /4	21.0						
RNB 200-22	7/8	23.0						
RNB 200-24	15/16	25.0						
RNB 200-27	1	28.0						

导线截面 : 300-400mm²(美国线规 500/600MCM) 最大电流 : I_{max}=650A 材质: 紫铜 材料厚度 : 4.2mm

Wire range: 300-400mm²/500/600MCM A.W.G. I_{max}: 650A Material: Copper Thickness: 4.2mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
RNB 325-8	5/16	8.4	50.5	88.0	33.5	35.5	37.1	28.0
RNB 325-10	3/8	10.5						
RNB 325-11	7/16	11.5						
RNB 325-12	1 /2	13.0						
RNB 325-14	9/16	15.0						
RNB 325-16	5/8	17.0	50.5	105.7	45.0	35.5	37.1	28.0
RNB 325-18	11/16	19.0						
RNB 325-20	3 /4	21.0						
RNB 325-22	7/8	23.0						
RNB 325-24	15/16	25.0						
RNB 325-27	1	28.0						

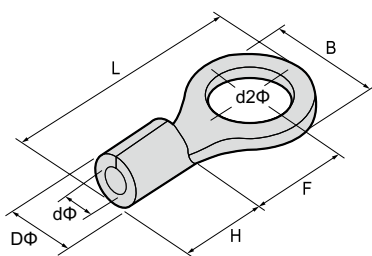

叉型预绝缘端头 INSULATED SPADE TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19AWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
SV1.25-3	#4	3.2	5.6	21.8	6.9	10.7	4.3	红 Red
SVS1.25-3.5	#6	3.7	5.6	21.8	6.9			
SVL1.25-3.5	#6	3.7	6.4	21.7	6.9			
SVS1.25-4	#8	4.3	6.4	21.7	6.9			
SVM1.25-4	#8	4.3	7.2	22.1	6.5			
SVL1.25-4	#8	4.3	8.1	21.6	6.5			
SVS1.25-5	#10	5.3	8.1	21.8	6.5			
SVL1.25-5	#10	5.3	9.6	22.0	6.7			
SVS1.25-6	1/4	6.5	9.6	22.0	6.7			
SVL1.25-6	1/4	6.5	12.0	27.2	11.0			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27AWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A


型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
SV2-3	#4	3.2	5.6	21.8	6.5	10.0	4.9	蓝 Blue
SVS2-3.5	#6	3.7	5.6	21.8	6.5			
SVL2-3.5	#6	3.7	6.4	22.4	6.5			
SVS2-4	#8	4.3	6.4	22.4	6.5			
SVM2-4	#8	4.3	7.2	22.2	6.5			
SVL2-4	#8	4.3	8.1	21.6	6.5			
SVS2-5	#10	5.3	8.1	22.2	6.5			
SVL2-5	#10	5.3	9.5	21.6	6.5			
SVS2-6	1/4	6.5	9.5	22.1	6.5			
SVL2-6	1/4	6.5	12.0	27.2	11.0			

导线截面 : 2.5-4mm²(美国线规 14-12) 最大电流 : I_{max}=37AWire range: 2.5-4mm²/14-12A.W.G. I_{max}: 37A

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
SV3.5-3	#4	3.2	5.7	26.4	7.0	13.6	6.2	黑 Black
SV3.5-4	#8	4.3	8.0	26.4	7.0			
SV3.5-5	#10	5.3	8.0	25.7	7.0			
SV3.5-6	1/4	6.5	12.0	29.3	12.1			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48AWire range: 4-6mm²/12-10A.W.G. I_{max}: 48A

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						颜色 Color
		d2	B	L	F	H	DØ	
SV5.5-3.5	#6	3.7	7.3	25.1	7.5	12.5	6.7	黄 Yellow
SVS5.5-4	#8	4.3	7.3	25.1	7.5			
SVL5.5-4	#8	4.3	9.0	25.7	7.5			
SV5.5-5	#10	5.3	9.0	25.7	7.5			
SVS5.5-6	1/4	6.5	9.0	25.6	7.5			
SVL5.5-6	1/4	6.5	11.8	30.3	12.0			
SV5.5-8	5/16	8.4	14.0	31.4	11.5			

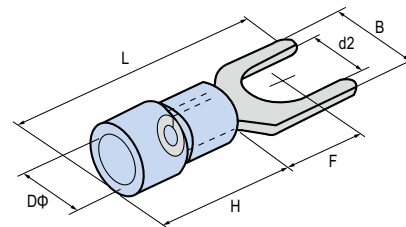

叉形裸端头 NON-INSULATED SPADE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度 : 0.75mm

Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Thickness: 0.75mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
SNB1.25-3	#4	3.2	5.7	16.0	6.5	4.8	3.4	1.7
SNBS1.25-3.5	#6	3.7	5.7	16.0	6.5			
SNBL1.25-3.5	#6	3.7	6.4	16.0	6.5			
SNBM1.25-4	#8	4.3	6.4	16.0	6.5			
SNBL1.25-4	#8	4.3	7.2	16.0	6.5			
SNBS1.25-5	#10	5.3	8.1	16.0	6.5			
SNBL1.25-5	#10	5.3	9.5	16.0	6.5			
SNBS1.25-6	1/4	6.4	9.5	16.0	6.5			
SNBL1.25-6	1/4	6.4	12.0	22.0	11.0			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材质: 紫铜 材料厚度 : 0.75mm

Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Thickness: 0.75mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
SNB2-3	#4	3.2	5.7	16.0	6.5	4.8	4.1	2.3
SNBS2-3.5	#6	3.7	5.7	16.0	6.5			
SNBL2-3.5	#6	3.7	6.4	16.0	6.5			
SNBS2-4	#8	4.3	6.4	16.0	6.5			
SNBM2-4	#8	4.3	7.2	16.0	6.5			
SNBL2-4	#8	4.3	8.1	16.0	6.5			
SNBS2-5	#10	5.3	8.1	16.0	6.5			
SNBL2-5	#10	5.3	9.5	16.0	6.5			
SNBS2-6	1/4	6.4	9.5	16.0	6.5			
SNBL2-6	1/4	6.4	12.0	22.0	11.0			

导线截面 : 2.5-4mm²(美国线规 14-12) 最大电流 : I_{max}=37A 材质: 紫铜 材料厚度 : 1.0mm

Wire range: 2.5-4mm²/14-12A.W.G. I_{max}: 37A Material: Copper Thickness: 1.0mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
SNB3.5-3	#4	3.2	5.7	18.3	7.0	6.0	5.0	3.0
SNB3.5-4	#8	4.3	8.0	18.3	7.0			
SNB3.5-5	#10	5.3	8.0	18.3	7.0			
SNB3.5-6	1/4	6.4	12.0	21.5	12.1			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜 材料厚度 : 1.0mm


Wire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Thickness: 1.0mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
SNB5.5-3.5	#6	3.7	7.1	18.0	7.5	6.8	5.4	3.4
SNBS5.5-4	#8	4.3	8.3	19.5	7.5			
SNBL5.5-4	#8	4.3	9.0	19.5	7.5			
SNB5.5-5	#10	5.3	9.0	19.5	7.5			
SNBS5.5-6	1/4	6.4	9.0	19.5	7.5			
SNBL5.5-6	1/4	6.4	12.0	25.5	12.0			
SNB5.5-8	5/16	8.4	14.0	24.5	11.5			

材质: 紫铜 材料厚度分别 : 1.2mm, 1.4mm, 1.7mm

Material: Copper Thickness: 1.2mm, 1.4mm, 1.7mm

型号 Item No.	美制螺栓号 AWG No.	尺寸 Dimension (mm)						
		d2	B	L	F	H	DØ	dØ
SNB 8-4	#8	4.3	8.7	23.0	6.0	8.5	7.2	4.5
SNB 8-5	#10	5.3	12.0	24.5	5.7	8.5	7.2	4.5
SNB 8-6	1/4	6.4	12.0	24.5	5.7	8.5	7.2	4.5
SNB 8-8	5/16	8.4	14.5	28.0	8.3	8.5	7.2	4.5
SNB 14-6	1/4	6.4	12.0	28.0	7.5	10.5	9.0	5.8
SNB 14-8	5/16	8.4	14.0	28.0	7.5	10.5	9.0	5.8
SNB 22-8	5/16	8.4	14.0	34.5	9.0	12.0	11.5	7.7

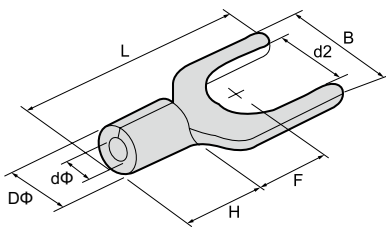


管型预绝缘端头 INSULATED CORD END TERMINALS

工作极限温度: 105 Ui=300V 端头材质: 紫铜管

Working limit temperature: 105 Ui=300V Material: Copper tube

型号 Item No.	尺寸 Dimension (mm)						导线面积 ITEM SQ.		绝缘套颜色 Insulation Color
	F	L	W	B	D	C	A.W.G.	mm ²	
E0206	6.0	10.4	2.5	4.4	1.0	0.7	#26	0.25	● Light Blue
E0208	8.0	12.4							
E0306	6.0	11.0							● Turquoise
E0308	8.0	13.0	2.5	4.4	1.1	0.8	#24	0.35	
E0506	6.0	12.0							
E0508	8.0	14.0							● Orange ○ White
E0510	10.0	16.0	2.6	6.0	1.3	1.0	#22	0.5	
E0512	12.0	18.0							
E7506	6.0	12.4							
E7508	8.0	14.6	2.8	6.4	1.5	1.2	#20	0.75	○ White ● Blue
E7510	10.0	16.4							
E7512	12.0	18.4							
E7518	18.0	24.3							
E1006	6.0	12.4	3.0	6.4	1.7	1.4	#18	1.0	● Yellow ● Red
E1008	8.0	14.6							
E1010	10.0	16.4							
E1012	12.0	18.4							
E1018	18.0	24.3	3.5	6.4	2.0	1.7	#16	1.5	● Red ● Black
E1508	8.0	14.6							
E1510	10.0	16.4							
E1512	12.0	18.3							
E1518	18.0	24.4	4.0	7.0	2.6	2.3	#14	2.5	● Blue ● Grey
E2508	8.0	15.2							
E2510	10.0	16.4							
E2512	12.0	19.0							
E2518	18.0	25.0	4.4	7.5	3.2	2.8	#12	4.0	● Grey ● Orange
E4009	9.0	16.5							
E4010	10.0	17.4							
E4012	12.0	19.5							
E4018	18.0	25.5	6.3	8.0	3.9	3.5	#10	6.0	● Black ● Green
E6012	12.0	20.0							
E6018	18.0	26.0							
E10-12	12.0	21.5	7.6	9.5	4.9	4.5	#7	10.0	● Ivory ● Brown Green
E10-18	18.0	27.5							
E16-12	12.0	22.2							● Green ● Ivory
E16-18	18.0	28.2	8.8	10.2	6.2	5.8	#5	16.0	
E25-12	12.0	24.0							
E25-16	16.0	29.0							● Brown Green ● Black
E25-22	22.0	35.0	11.2	13.0	7.9	7.5	#4	25.0	
E35-16	16.0	30.0							
E35-18	18.0	32.0							
E35-22	22.0	36.0							
E35-25	25.0	39.0							
E50-12	12.0	28.0	15.3	16.0	10.9	10.3	#1	50.0	
E50-20	20.0	36.0							○ Olive
E50-25	25.0	41.0							
E70-20	20.0	37.0	16.0	17.0	14.3	13.5	#2/0	70.0	● Yellow
E70-25	25.0	42.0							
E95-25	25.0	44.0	18.5	19.0	15.6	14.8	#3/0	95.0	● Red
E120-27	27.0	47.6	20.3	20.6	17.1	16.7	#4/4	120.0	● Black
E120-32	32.0	52.6							
E150-25	25.0	50.6	23.4	25.6	20.6	19.6	250-300 mcm	150.0	● Yellow
E150-27	27.0	52.6							
E150-32	32.0	57.6							



管型裸端头 NON-INSULATED CORD END TERMINALS

工作极限温度: 105 Ui=300V 端头材质: 紫铜管

Working limit temperature: 105 Ui=300V Material: Copper tube




型号 Item No.	尺寸 Dimension (mm)				导线面 ITEM SQ.	
	L	D	C	W	A.W.G	mm ²
EN0206	6.0	1.0	0.7	1.4	#26	0.2
EN0207	7.0					
EN0208	8.0					
EN0306	6.0	1.1	0.8	1.5	#24	0.3
EN0308	8.0					
EN0505	5.0					
EN0506	6.0	1.3	1.0	1.7	#22	0.5
EN0508	8.0					
EN0510	10.0					
EN0512	12.0					
EN7506	6.0	1.6	1.3	1.9	#20	0.75
EN7508	8.0					
EN7510	10.0					
EN7512	12.0					
EN1006	6.0	1.8	1.5	2.2	#18	1.0
EN1008	8.0					
EN1010	10.0					
EN1012	12.0					
EN1507	7.0	2.1	1.8	2.5	#16	1.5
EN1508	8.0					
EN1510	10.0					
EN1512	12.0					
EN1518	18.0					
EN2507	7.0	2.6	2.3	3.3	#14	2.5
EN2508	8.0					
EN2510	10.0					
EN2512	12.0					
EN2518	18.0					
EN4009	9.0	3.2	2.8	3.9	#12	4.0
EN4012	12.0					
EN4018	18.0					
EN6010	10.0	3.9	3.5	4.8	#10	6.0
EN6012	12.0					
EN6015	15.0					
EN6018	18.0					
EN10-12	12.0	4.9	4.5	5.8	#7	10.0
EN10-15	15.0					
EN10-18	18.0					
EN16-12	12.0	6.2	5.8	7.5	#5	16.0
EN16-15	15.0					
EN16-18	18.0					
EN25-16	16	7.9	7.5	9.1	#4	25.0
EN25-22	22					
EN35-16	16	8.7	8.3	10.2	#2	35.0
EN35-25	25					
EN50-20	20	10.9	10.3	12.4	#1	50.0
EN50-25	25					
EN50-30	30.0	10.9	10.3	12.7	1/0	50.0
EN50-32	32.0					
EN70-22	22.0	14.3	13.5	15.8	2/0	75.0
EN70-25	25.0					
EN70-30	30.0					
EN70-32	32.0					

管型裸端头 NON-INSULATED CORD END TERMINALS

工作极限温度: 105 Ui=300V 端头材质: 紫铜管

Working limit temperature: 105 Ui=300V Material: Copper tube

型号 Item No.	尺寸 Dimension (mm)				导线面 ITEM SQ.	
	L	D	C	W	A.W.G	mm ²
EN95-25	25.0	15.3	14.5	17.3	3/0	95.0
EN95-30	30.0					
EN95-32	32.0					
EN95-34	34.0					
EN120-30	30.0	17.5	16.5	20.2	4/0	120.0
EN120-32	32.0					
EN120-34	34.0					
EN120-38	38.0					
EN120-40	40.0					
EN150-32	32.0	20.6	19.6	23.0	250/300	150.0
EN150-34	34.0					
EN150-38	38.0					
EN150-40	40.0					
EN185-32	32.0	21.4	20.2	23.9	250/300	185.0
EN185-40	40.0					

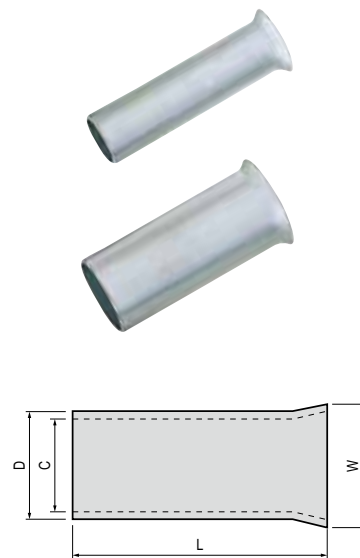


双线管型预绝缘端头 INSULATED CORD END TWIN TERMINALS

工作极限温度: 105 Ui=300V 端头材质: 紫铜管

Working limit temperature: 105 Ui=300V Material: Copper tube

型号 Item No.	接插规格 Conductor (mm ²)	尺寸 Dimension (mm)						颜色 Color System		
		F	L	W	B	D	C	French	German	DIN
TE0.5-8	2×0.5	8.0	14.5	5.0	6.5	1.8	1.5	White	Orange	White
TE0.5-10	2×0.5	10.0	16.5	5.0	6.5	1.8	1.5	White	Orange	White
TE0.75-8	2×0.75	8.0	15.8	5.5	6.7	2.1	1.8	Blue	White	Grey
TE0.75-10	2×0.75	10.0	17.8	5.5	6.7	2.1	1.8	Blue	White	Grey
TE1.0-8	2×1.0	8.0	15	8	7.1	2.3	2.0	Red	Yellow	Red
TE1.0-10	2×1.0	10.0	18.0	5.5	7.1	2.3	2.0	Red	Yellow	Red
TE1.5-8	2×1.5	8.0	16.0	6.4	7.2	2.6	2.3	Black	Red	Black
TE1.5-12	2×1.5	12.0	20.0	6.4	7.5	2.6	2.3	Black	Red	Black
TE2.5-10	2×2.5	10.0	19.8	8.0	8.5	3.3	2.9	Grey	Blue	Blue
TE2.5-13	2×2.5	13.0	22.8	8.0	8.5	3.3	2.9	Grey	Blue	Blue
TE4-12	2×4.0	12.0	22.2	8.8	11.1	4.2	3.8	Orange	Grey	Grey
TE6-14	2×6.0	14.0	25.2	9.5	12.1	5.3	4.9	Green	Black	Yellow
TE10-14	2×10.0	14.0	26.0	12.6	12.0	6.9	6.5	Brown	Ivory	Red
TE16-14	2×16.0	14.0	30.3	19.0	17.3	8.7	8.3	Ivory	Green	Blue

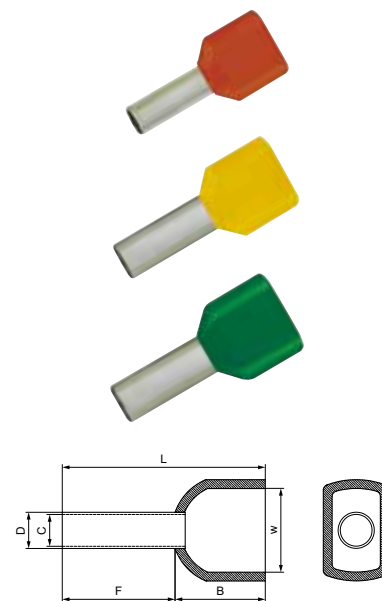

双线管型预绝缘端头 INSULATED CORD END LONG TAIL TERMINALS


型号 Item No.	尺寸 Dimension (mm)	颜色 Color
	L	
LD2-0075	8.0	红色 Red
LD2-010	8.0	红色 Red
LD2-0152	8.0	红色 Red
LD2-0252	8.0	红色 Red
LD2-4009	9.0	红色 Red
LD2-6012	12.0	红色 Red



母预绝缘端头 INSULATED FEMALE TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 黄铜

Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Brass



型号 Item No.	材质 MEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			BØ	dØ	DØ	L	H	
FDD1.25-110(5)	0.5 x 2.8	0.4	3.8	1.70	3.80	19.0	10.0	红 Red
FDD1.25-110(8)	0.8 x 2.8	0.4	3.8	1.70	3.80	19.0	10.0	红 Red
FDD1.25-187(5)	0.5 x 4.75	0.4	5.6	1.70	3.80	19.0	10.0	红 Red
FDD1.25-187(8)	0.8 x 4.75	0.4	5.6	1.70	3.80	19.0	10.0	红 Red
FDD1.25-205	0.5 x 5.2	0.4	6.5	1.70	3.80	20.0	10.0	红 Red
FDD1.25-250	0.8 x 6.35	0.4	7.4	1.70	3.80	21.0	10.0	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15A 材质: 黄铜

Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 15A Material: Brass

型号 Item No.	材质 MEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			BØ	dØ	DØ	L	H	
FDD2-110(5)	0.5 x 2.8	0.4	3.8	2.3	4.3	19.0	10.0	蓝 Blue
FDD2-110(8)	0.8 x 2.8	0.4	3.8	2.3	4.3	19.0	10.0	蓝 Blue
FDD2-187(5)	0.5 x 4.75	0.4	5.6	2.3	4.3	19.0	10.0	蓝 Blue
FDD2-187(8)	0.8 x 4.75	0.4	5.6	2.3	4.3	19.0	10.0	蓝 Blue
FDD2-205	0.5 x 5.2	0.4	6.5	2.3	4.3	19.0	10.0	蓝 Blue
FDD2-250	0.8 x 6.35	0.4	7.4	2.3	4.3	21.0	10.0	蓝 Blue
FDD2-312	0.8 x 8.0	0.4	9.0	2.3	4.3	23.0	10.0	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=24A 材质: 黄铜


Wire range: 4-6mm²/12-10A.W.G. I_{max}: 24A Material: Brass

型号 Item No.	材质 MEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			BØ	dØ	DØ	L	H	
FDD5.5-250	0.5 x 6.35	0.4	7.4	3.4	5.7	25.0	14.0	黄 Yellow
FDD5.5-375	1.2 x 9.4	0.4	10.9	3.4	5.7	29.6	14.0	黄 Yellow

公预绝缘端头 INSULATED MALE TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A

Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A



型号 Item No.	材质 MEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			BØ	dØ	DØ	L	H	
MDD1.25-110(5)	0.5 x 2.8	0.4	2.8	1.70	4.3	17.7	10.0	红 Red
MDD1.25-110(8)	0.8 x 2.8	0.4	2.8	1.70	4.3	17.7	10.0	红 Red
MDD1.25-187(5)	0.5 x 4.75	0.4	4.75	1.70	4.3	20.0	10.0	红 Red
MDD1.25-187(8)	0.8 x 4.75	0.4	4.75	1.70	4.3	18.5	10.0	红 Red
MDD1.25-250	0.8 x 6.35	0.4	6.35	1.70	4.3	21.0	10.0	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15A

Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 15A

型号 Item No.	材质 MEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			BØ	dØ	DØ	L	H	
MDD2-187(5)	0.5 x 4.75	0.4	4.75	2.3	4.3	20.0	10.0	蓝 Blue
MDD2-187(8)	0.8 x 4.75	0.4	4.75	2.3	4.3	18.5	10.0	蓝 Blue
MDD2-250	0.8 x 6.35	0.4	6.35	2.3	4.3	21.0	10.0	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A

Wire range: 4-6mm²/12-10A.W.G. I_{max}: 48A

型号 Item No.	材质 MEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			BØ	dØ	DØ	L	H	
MDD5.5-250	0.8 x 6.35	0.4	6.35	2.3	4.3	21.0	10.0	黄 Yellow

针型预绝缘端头 INSULATED PIN TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper

型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	FØ	L	H	DØ	
PTV1.25-9	1.9	19.0	10.0	4.3	红 Red
PTV1.25-10	1.9	20.0	10.0	4.3	红 Red
PTV1.25-12	1.9	22.0	10.0	4.3	红 Red
PTV1.25-13	1.9	23.0	10.0	4.3	红 Red
PTV1.25-18	1.9	28.0	10.0	4.3	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材质: 紫铜Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper


型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	FØ	L	H	DØ	
PTV2-9	1.9	19.0	10.0	4.9	蓝 Blue
PTV2-10	1.9	20.0	10.0	4.9	蓝 Blue
PTV2-12	1.9	22.0	10.0	4.9	蓝 Blue
PTV2-13	1.9	23.0	10.0	4.9	蓝 Blue
PTV2-18	1.9	28.0	10.0	4.9	蓝 Blue

导线截面 : 2.5~4mm²(美国线规 14-12) 最大电流 : I_{max}=36A 材质: 紫铜Wire range: 2.5~4mm²/A.W.G. 14-12 I_{max}: 36A Material: Copper

型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	FØ	L	H	DØ	
PTV3.5-10	2.8	20.0	13.0	6.2	黄 Yellow
PTV3.5-13	2.8	25.0	13.0	6.2	黄 Yellow

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜Wire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper

型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	FØ	L	H	DØ	
PTV5.5-13	2.8	25.5	12.5	6.7	黄 Yellow
PTV5.5-18	2.8	30.5	12.5	6.7	黄 Yellow



肩背型公、母预绝缘接头 INSULATED PIGGY BACK DISCONNECTORS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 黄铜Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Brass


型号 Item No.	材质 MEMA TAB t×B1 (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	H	DØ	dØ	L	
PBDD1.25-250	0.8×6.35	7.4	6.3	10.0	3.8	1.7	21.5	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15A 材质: 黄铜Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 15A Material: Brass

型号 Item No.	材质 MEMA TAB t×B1 (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	H	DØ	dØ	L	
PBDD2-250	0.8×6.35	7.4	6.3	10.0	4.3	2.3	21.5	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=24A 材质: 黄铜Wire range: 4-6mm²/12-10A.W.G. I_{max}: 24A Material: Brass

型号 Item No.	材质 MEMA TAB t×B1 (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	H	DØ	dØ	L	
PBDD5.5-250	0.8×6.35	7.4	6.3	14.0	5.7	3.4	25.0	黄 Yellow



针形裸端头 NON-INSULATED PIN TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度: 0.75mm
Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}:19A Material: Copper Material thickness: 0.75mm

型号 Item No.	尺寸 Dimension (mm)				
	F	L	E	DØ	dØ
PTN1.25-9	1.9	13.8	4.8	3.4	1.7
PTN1.25-10	1.9	14.8			
PTN1.25-12	1.9	16.8			
PTN1.25-13	1.9	17.8			
PTN1.25-18	1.9	22.8			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材质: 紫铜 材料厚度: 0.8mm
Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Material thickness: 0.8mm


型号 Item No.	尺寸 Dimension (mm)				
	F	L	E	DØ	dØ
PTN2-9	1.9	13.8	4.8	4.1	2.3
PTN2-10	1.9	14.8			
PTN2-12	1.9	16.8			
PTN2-13	1.9	17.8			
PTN2-18	1.9	22.8			

导线截面 : 2.5-4mm²(美国线规 14-12) 最大电流 : I_{max}=36A 材质: 紫铜 材料厚度: 1.0mm
Wire range: 2.5-4mm²/A.W.G. 14-12 I_{max}: 36A Material: Copper Material thickness: 1.0mm

型号 Item No.	尺寸 Dimension (mm)				
	F	L	E	DØ	dØ
PTN3.5-10	2.8	14.8	6.0	5.0	3.0
PTN3.5-13	2.8	19.8			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜 材料厚度: 1.0mm
Wire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Material thickness: 1.0mm


型号 Item No.	尺寸 Dimension (mm)				
	F	L	E	DØ	dØ
PTN5.5-13	2.8	19.8	6.0	5.6	3.4
PTN5.5-18	2.8	24.8			

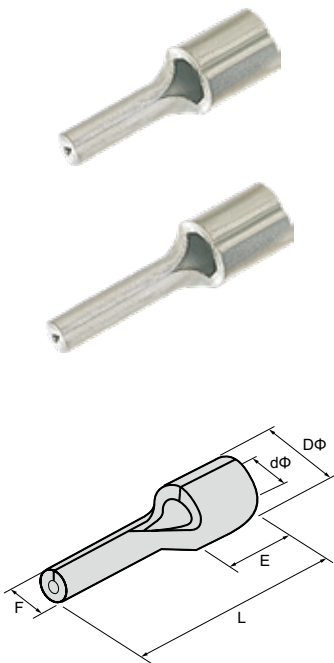

扁针形裸端头 NON-INSULATED PINLUG

材质: 紫铜
Material: Copper

型号 Item No.	尺寸 Dimension (mm)									Wire Size (mm ²)	I _{max} (A)
	W	F	L	E	D	d1	H	T			
TNA10-12	4.3	12.0	22.0	8.0	6.9	4.7	2.4	1.0		6-10	60
TNA16-13	5.5	14.0	27.0	10.0	8.4	5.8	2.6	1.2		10-16	90
TNA25-15	6.8	16.0	33.5	13.5	9.5	7.0	2.6	1.2		16-25	100
TNA35-20	8.0	20.0	40.5	16.0	11.7	8.4	3.2	1.5		35	120
TNA50-22	9.5	20.0	45.5	19.0	13.6	9.6	3.8	1.8		50	150
TNA70-23	11.0	23.0	55.5	24.0	15.9	11.4	4.2	2.0		70	210
TNA95-27	12.5	27.0	55.5	25.0	18.9	13.5	5.2	2.5		95	238
TNA120-34	15.0	30.0	58.6	25.0	21.0	15.0	5.4	2.7		120	300
TNA150-37	16.5	30.0	63.5	27.8	23.1	16.5	6.4	3.3		150	370
TNA185-38	19.5	30.0	71.0	35.0	26.0	19.0	6.8	3.5		185	400
TNA240-44	21.5	32.0	83.5	40.7	29.0	21.0	8.2	4.0		240	480
TNA300-45	23.5	34.0	87.0	44.0	32.1	23.5	8.4	4.3		300	560
TNA400-48	27.0	35.0	93.0	48.4	36.0	27.0	8.8	4.5		400	815

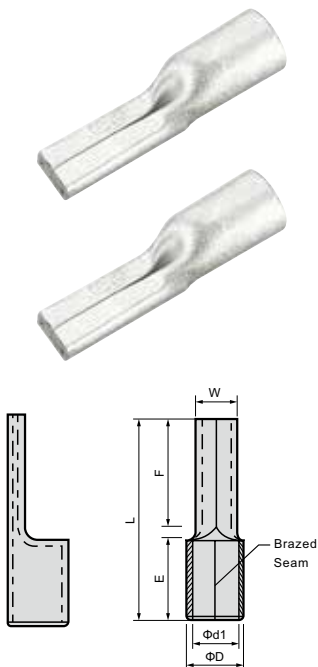

片型预绝缘接头 INSULATED BLADE TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 紫铜 材料厚度: 0.6mmWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Copper Material thickness: 0.6mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	W	L	F	H	D	
DBV1.25-10	2.3	20.0	10.0	10.0	4.3	红 Red
DBV1.25-11	3.0	21.0	11.0	10.0	4.3	红 Red
DBV1.25-14	3.0	24.0	14.0	10.0	4.3	红 Red
DBV1.25-18	2.3	28.0	18.0	10.0	4.3	红 Red

导线截面 : 1.5-2.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度: 0.65mmWire range: 1.5-2.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.65mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	W	L	F	H	D	
DBV2-9	2.8	19.0	9.0	10.0	4.9	蓝 Blue
DBV2-14	2.4	24.0	14.0	10.0	4.9	蓝 Blue
DBV2-18	2.3	28.0	18.0	10.0	4.9	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜 材料厚度: 0.85mmWire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Material thickness: 0.85mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	W	L	F	H	D	
DBV5.5-10	2.8	22.5	10.0	13.0	5.6	黄 Yellow
DBV5.5-14	4.5	26.5	14.0	13.0	5.6	黄 Yellow
DBV5.5-18	4.5	30.5	18.0	13.0	5.6	黄 Yellow



凹片型预绝缘端头 INSULATED LIPPED BLADE TERMINALS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19AWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		W	L	F	B	D	C	
LBV1.25-3	0.6	3.0	26.8	16.8	10.7	3.4	1.7	红 Red
LBV1.25-4.6	0.6	4.6	26.8	16.8	10.7	3.4	1.7	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27AWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		W	L	F	B	D	C	
LBV2-3	0.65	3.0	26.8	16.8	10.0	4.1	2.3	蓝 Blue
LBV2-4.6	0.65	4.6	26.8	16.8	10.0	4.1	2.3	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=27AWire range: 4-6mm²/12-10A.W.G. I_{max}: 27A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		W	L	F	B	D	C	
LBV5.5-3	0.8	3.0	29.3	16.8	13.6	5.6	3.4	黄 Yellow
LBV5.5-4.6	0.8	4.6	29.3	16.8	13.6	5.6	3.4	黄 Yellow



片形裸端头 NON-INSULATED BLADE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 紫铜 材料厚度: 0.6mm
Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Copper Material thickness: 0.6mm


型号 Item No.	尺寸 Dimension (mm)					
	B	L	F	E	DØ	dØ
DBN1.25-10	2.3	14.8	10.0	4.8	3.4	1.7
DBN1.25-11	2.3	15.8	11.0			
DBN1.25-14	2.3	18.8	14.0			
DBN1.25-18	2.3	22.8	18.0			

导线截面 : 1.5-2.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度: 0.65mm
Wire range: 1.5-2.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.65mm

型号 Item No.	尺寸 Dimension (mm)					
	B	L	F	E	DØ	dØ
DBN2-9	2.3	13.8	9.0	4.8	4.1	2.3
DBN2-14	2.3	18.8	14.0			
DBN2-18	2.3	22.8	18.0			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜 材料厚度: 0.85mm
Wire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Material thickness: 0.85mm

型号 Item No.	尺寸 Dimension (mm)					
	B	L	F	E	DØ	dØ
DBN 5.5-10	2.8	14.8	10.0	6.0	5.6	3.4
DBN 5.5-14	4.5	21.0	14.0			
DBN 5.5-18	4.5	23.0	18.0			
DBN 8-14	5.0	22.5	14.0	8.5	7.2	4.5
DBN 14-16	6.0	30.6	16.0	14.0	9.0	6.5

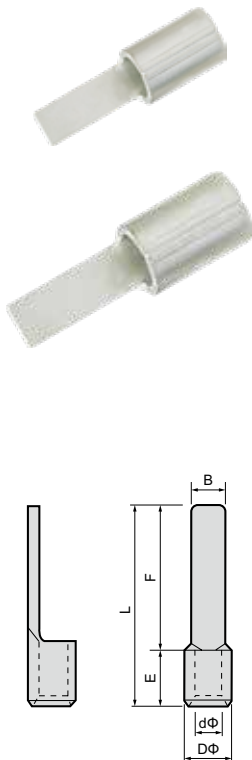

锁扣叉形裸端头 NON-INSULATED LOCKING SPADE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度: 0.75mm
Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.75mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2 (mm)	尺寸 Dimension (mm)					
			B	F	L	E	DØ	dØ
LSV1.25-3.5	#6	3.7	6.4	6.5	16.0	4.8	3.4	1.7
LSVS1.25-4	#8	4.3	7.2					
LSVL1.25-4	#8	4.3	8.1					
LSVS1.25-5	#10	5.3	8.1					
LSVL1.25-5	#10	5.3	9.5					

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材质: 紫铜 材料厚度: 0.8mm
Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Material thickness: 0.8mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2 (mm)	尺寸 Dimension (mm)					
			B	F	L	E	DØ	dØ
LSV2-3.5	#6	3.7	6.4	6.5	16.0	4.8	4.1	2.3
LSVS2-4	#8	4.3	7.2					
LSVL2-4	#8	4.3	8.1					
LSVS2-5	#10	5.3	8.1					
LSVL2-5	#10	5.3	9.5					

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=38A 材质: 紫铜 材料厚度: 1.0mm
Wire range: 4-6mm²/12-10A.W.G. I_{max}: 38A Material: Copper Material thickness: 1.0mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2 (mm)	尺寸 Dimension (mm)					
			B	F	L	E	DØ	dØ
LSV5.5-3.5	#6	3.7	8.3	7.5	19.5	6.0	5.6	3.4
LSVS5.5-4	#8	4.3	8.3					
LSVS5.5-5	#10	5.3	9.0					
LSVS5.5-6	1/4	6.4	12.0					



凸缘叉型预绝缘端头

RAISE FURCATED PRE-INSULATING TERMINALS

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19A 材质: 紫铜 材料厚度: 0.6mmWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.6mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	L	F	H	DØ	
FSV1.25-3.5	#6	3.7	7.5	23.7	5.2	10.7	4.3	红 Red
FSV1.25-4	#8	4.3	7.5	23.7	5.2			
FSV1.25-5	#10	5.3	7.5	23.7	5.2			

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27A 材质: 紫铜 材料厚度: 0.65mmWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Material thickness: 0.65mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	L	F	H	DØ	
FSV2-3.5	#6	3.7	7.5	23.7	5.2	10.0	4.9	蓝 Blue
FSV2-4	#8	4.3	7.5	23.7	5.2			
FSV2-5	#10	5.3	7.5	23.7	5.2			

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=48A 材质: 紫铜 材料厚度: 0.85mmWire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Material thickness: 0.85mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	L	F	H	DØ	
FSV5.5-3.5	#6	3.7	7.5	23.7	5.2	12.5	6.7	黄 Yellow
FSV5.5-4	#8	4.3	7.5	23.7	5.2			
FSV5.5-5	#10	5.3	7.5	23.7	5.2			

锁扣叉形预绝缘端头

SHAPECLOSE FURCATED PRE-INSULATING JOINT

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19A 材质: 紫铜 材料厚度: 0.75mmWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.75mm



型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	L	F	H	DØ	
LSV1.25-3.5	#6	3.7	6.4	21.2	6.5	10.7	4.3	红 Red
LSVS1.25-4	#8	4.3	7.2	21.2	6.5			
LSVL1.25-4	#8	4.3	8.1	21.2	6.5			
LSVS1.25-5	#10	5.3	8.1	21.2	6.5	10.0	4.9	蓝 Blue
LSVL1.25-5	#10	5.3	9.5	21.2	6.5			

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27A 材质: 紫铜 材料厚度: 0.8mmWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Material thickness: 0.8mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	L	F	H	DØ	
LSV2-3.5	#6	3.7	6.4	21.2	6.5	10.0	4.9	蓝 Blue
LSVS2-4	#8	4.3	7.2	21.2	6.5			
LSVL2-4	#8	4.3	8.1	21.2	6.5			
LSVS2-5	#10	5.3	8.1	21.2	6.5	13.0	6.7	黄 Yellow
LSVL2-5	#10	5.3	9.5	21.2	6.5			

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=38A 材质: 紫铜 材料厚度: 1.0mmWire range: 4-6mm²/12-10A.W.G. I_{max}: 38A Material: Copper Material thickness: 1.0mm

型号 Item No.	美制螺栓号 AWG No.	螺栓口直径 d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	L	F	H	DØ	
LSV5.5-3.5	#6	3.7	8.3	25.2	7.5	13.0	6.7	黄 Yellow
LSVS5.5-4	#8	4.3	8.3	25.2	7.5			
LSVS5.5-5	#10	5.3	9.0	23.9	7.5			
LSVS5.5-6	1/4	6.4	12.0	31.2	12.0			



长型全绝缘中间接头

INSULATED BUTT CONNECTORS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 紫铜 绝缘材料: PVC
Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Copper Insulating material: PVC


型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)			最大电流 (A) I _{max}	颜色 Color
	A.W.G.	mm ²	l	DØ	L		
BV1.25	22-16	0.5-1.5	15.0	1.7	26.0	19	红 Red
BV2	16-14	1.5-2.5	15.0	2.3	26.0	27	蓝 Blue
BV5.5	12-10	4-6	15.0	3.4	26.0	48	黄 Yellow
BV8	#8	6-10	21.0	4.5	32.0	62	红 Red
BV14	#6	10-16	26.0	5.8	42.0	88	蓝 Blue
BV22	#4	16-25	29.0	7.7	50.0	115	黄 Yellow
BV38	#2	35-50	32.0	9.4	55.0	160	红 Red

短型全绝缘中间接头

INSULATED BUTT CONNECTORS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 紫铜 绝缘材料: PVC
Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Copper Insulating material: PVC


型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)			最大电流 (A) I _{max}	颜色 Color
	A.W.G.	mm ²	l	DØ	L		
PVT1.25	22-16	0.5-1.5	8.0	1.7	16.0	19	红 Red
PVT2	16-14	1.5-2.5	8.0	2.3	16.0	27	蓝 Blue
PVT5.5	12-10	4-6	8.5	3.4	20.5	48	黄 Yellow

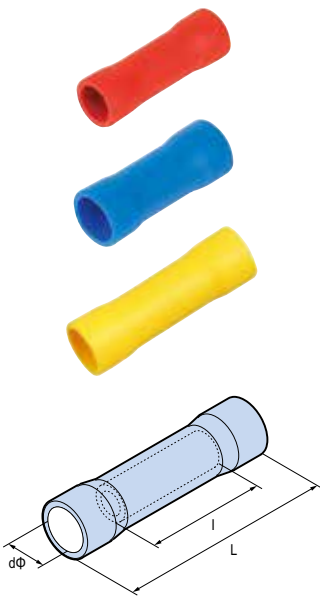

中间裸接头 NON- INSULATED BUTT CONNECTOR

材质: 紫铜
Material: Copper

型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)		
	A.W.G.	mm ²	DØ	dØ	L
BN 1.25	22-16	0.5-1.5	3.3	1.7	15.0
BN 2	16-14	1.5-2.5	4.0	2.3	15.0
BN 3.5	14-12	2.5-4	5.0	3.0	15.0
BN 5.5	12-10	4-6	5.5	3.4	15.0
BN 8	#8	10	7.1	4.5	21.0
BN 14	#6	16	9.0	5.8	26.0
BN 22	#4	25	11.4	7.7	39.0
BN 38	#2	35	13.3	9.4	32.0
BN 60	1/0	50	15.4	11.4	36.0
BN 70	2/0	70	17.5	13.3	37.0
BN 80	3/0	95	19.4	14.5	38.0
BN 100	4/0	120	22.0	16.4	38.0
BN 150	250-300MCM	150	26.5	19.5	54.0
BN 180	300-350MCM	185	28.5	21.0	57.0
BN 200	400MCM	240	32.5	24.0	63.0
BN 325	500-600MCM	300	37.0	28.0	72.0

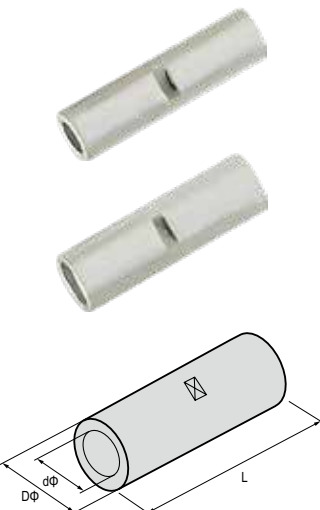

钩形预绝缘端头 INSULATED HOOK TERMINALS

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19A 材质: 紫铜 材料厚度: 0.75mmWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.75mm


型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)					颜色 Color
	A.W.G.	mm ²	B	L	F	H	DØ	
HV1.25-3.5	#6	3.7	8.0	21.0	7.0	10.7	4.3	红 Red
HV1.25-4	#8	4.3	8.0	21.0	7.0	10.7	4.3	红 Red
HV1.25-5	#10	5.3	8.0	21.0	7.0	10.7	4.3	红 Red
HV1.25-6	1/4	6.5	11.6	27.0	11.1	10.7	4.3	红 Red

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27A 材质: 紫铜 材料厚度: 0.8mmWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Material thickness: 0.8mm

型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)					颜色 Color
	A.W.G.	mm ²	B	L	F	H	DØ	
HV2-3.5	#6	3.7	8.5	22.0	7.75	10.0	4.9	蓝 Blue
HV2-4	#8	4.3	8.5	22.0	7.75	10.0	4.9	蓝 Blue
HV2-5	#10	5.3	9.5	22.0	7.25	10.0	4.9	蓝 Blue
HV2-6	1/4	6.5	12.0	27.0	11.0	10.0	4.9	蓝 Blue

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=48A 材质: 紫铜 材料厚度: 1.0mmWire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Material thickness: 1.0mm

型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)					颜色 Color
	A.W.G.	mm ²	B	L	F	H	DØ	
HV5.5-3.5	#6	3.7	7.2	21.4	5.9	13.6	6.7	黄 Yellow
HV5.5-4	#8	4.3	9.5	25.5	8.25	13.6	6.7	黄 Yellow
HV5.5-5	#10	5.3	9.5	25.5	8.25	13.6	6.7	黄 Yellow
HV5.5-6	1/4	6.5	12.0	31.5	13.0	13.6	6.7	黄 Yellow



钩形裸端头 NON-INSULATED HOOK TERMINAL

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19A 材质: 紫铜 材料厚度: 0.75mmWire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 19A Material: Copper Material thickness: 0.75mm


型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)					
	A.W.G.	mm ²	B	F	L	E	DØ	dØ
HNB1.25-3.5	#6	3.7	8.0	7.0	15.8	4.8	3.4	1.7
HNB1.25-4	#8	4.3						
HNB1.25-5	#10	5.3						
HNB1.25-6	1/4	6.5	11.6	11.0	21.8			

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27A 材质: 紫铜 材料厚度: 0.8mmWire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 27A Material: Copper Material thickness: 0.8mm

型号	导线面积 Line SQ.		尺寸 Dimension (mm)					
Item No.	A.W.G.	mm ²	B	F	L	E	DØ	dØ
HNB2-3.5	#6	3.7	8.5	7.8	16.8	4.8	4.1	2.3
HNB2-4	#8	4.3	8.5	7.8				
HNB2-5	#10	5.3	9.5	7.3				
HNB2-6	1/4	6.5	12.0	11.0	21.8			

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=48A 材质: 紫铜 材料厚度: 1.0mmWire range: 4-6mm²/12-10A.W.G. I_{max}: 48A Material: Copper Material thickness: 1.0mm

型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)					
	A.W.G.	mm ²	B	F	L	E	DØ	dØ
HNB5.5-3.5	#6	3.7	7.2	6.1	15.7	6.0	5.6	3.4
HNB5.5-4	#8	4.3	9.5	9.5	19.8			
HNB5.5-5	#10	5.3	9.5	9.5	19.8			
HNB5.5-6	1/4	6.4	12.0	10.3	22.5			
HNB5.5-8	5/16	8.4	15.0	13.5	27.0			



子弹型母预绝缘端头

INSULATED RECEPTACLE DISCONNECTORS

导线截面 : 0.5-1.5mm² (美国线规 22-16) 最大电流 : I_{max}=10A 材质: 黄铜

Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Brass

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		bØ	F	DØ	dØ	H	L	
FRD1.25-156	0.4	4.0	6.3	2.7	1.7	13.0	24.5	红 Red

导线截面 : 1.5-2.5mm² (美国线规 16-14) 最大电流 : I_{max}=15A 材质: 黄铜


Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 15A Material: Brass

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		bØ	F	DØ	dØ	H	L	
FRD2-156	0.4	4.0	6.3	3.3	2.3	14.0	24.5	蓝 Blue
FRD2-195	0.4	5.0	7.0	3.3	2.3	14.0	24.5	蓝 Blue

导线截面 : 4-6mm² (美国线规 12-10) 最大电流 : I_{max}=24A 材质: 黄铜

Wire range: 4-6mm²/12-10A.W.G. I_{max}: 24A Material: Brass

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		bØ	F	DØ	dØ	H	L	
FRD5.5-195	0.4	5.0	7.0	4.5	3.4	14.0	25.0	黄 Yellow

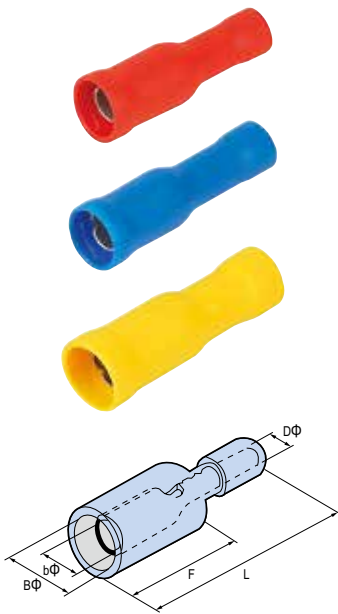

子弹型公预绝缘端头

INSULATED BULLET DISCONNECTORS

导线截面 : 0.5-1.5mm² (美国线规 22-16) 最大电流 : I_{max}=10A 材质: 黄铜

Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Brass

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		bØ	F	DØ	dØ	H	L	
MPD1.25-156	0.4	4.0	11.0	2.7	1.7	10.0	21.0	红 Red

导线截面 : 1.5-2.5mm² (美国线规 16-14) 最大电流 : I_{max}=15A 材质: 黄铜

Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 15A Material: Brass

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		bØ	F	DØ	dØ	H	L	
MPD2-156	0.4	4.0	16.0	2.7	1.7	10.0	21.0	蓝 Blue
MPD2-195	0.4	5.0	16.0	2.7	1.7	10.0	21.0	蓝 Blue

导线截面 : 4-6mm² (美国线规 12-10) 最大电流 : I_{max}=24A 材质: 黄铜

Wire range: 4-6mm²/12-10A.W.G. I_{max}: 24A Material: Brass

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)						颜色 Color
		bØ	F	DØ	dØ	H	L	
MPD5.5-195	0.4	4.0	11.0	4.5	3.4	14.0	25.0	黄 Yellow



母全绝缘接头

FULLY VINYL INSULATED DISCONNECTORS

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A 材质: 黄铜Wire range: 0.5-1.5mm²/22-16A.W.G. I_{max}: 10A Material: Brass

型号 Item No.	材质 MEMA TAB (mm)	尺寸 Dimension (mm)					颜色 Color
		W	B	DØ	dØ	L	
FDFD1.25-187(5)	0.5×4.75	5.6	3.28	4.0	1.7	20.0	红 Red
FDFD1.25-187(8)	0.8×4.75	5.6	3.28	4.0	1.7	20.0	红 Red
FDFD1.25-250	0.8×6.35	7.4	3.28	4.0	1.7	21.5	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15A 材质: 黄铜Wire range: 1.5-2.5mm²/16-14A.W.G. I_{max}: 15A Material: Brass

型号 Item No.	材质 MEMA TAB (mm)	尺寸 Dimension (mm)					颜色 Color
		W	B	DØ	dØ	L	
FDFD2-187(5)	0.5×4.75	5.6	5.0	4.5	2.3	20.0	蓝 Blue
FDFD2-187(8)	0.8×4.75	5.6	5.0	4.5	2.3	20.0	蓝 Blue
FDFD2-250	0.8×6.35	7.4	5.0	4.5	2.3	21.5	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=19A 材质: 黄铜Wire range: 4-6mm²/12-10A.W.G. I_{max}: 19A Material: Brass

型号 Item No.	材质 MEMA TAB (mm)	尺寸 Dimension (mm)					颜色 Color
		W	B	DØ	dØ	L	
FDFD5.5-250	0.8×6.35	7.4	6.6	5.7	3.4	25.5	黄 Yellow





快速连接端头 QUICK SPLIC CONNECTORS

工作极限温度: 105°C U_i=300V 端头材质: 黄铜

型号 Item No.	尺寸 Dimension (mm)		导线截面 Line SQ.		颜色 Color
	L	W	Twine(mm ²)	AWG	
KW-1	37.5	8.5	0.25-1.65	22-16	红 Red
KW-2	37.5	8.5	1.04-2.63	16-14	蓝 Blue
KW-3	37.5	8.5	2.63-6.64	12-10	黄 Yellow

工作极限温度: 105°C U_i=300V 端头材质: 黄铜

型号 Item No.	尺寸 Dimension (mm)		导线截面 Line SQ.		颜色 Color
	L	W	Twine(mm ²)	AWG	
3MR	20	20	0.25-1.65	22-16	红 Red
3MB	20	20	1.04-2.63	16-14	蓝 Blue
3MY	21	21	2.63-6.64	12-10	黄 Yellow

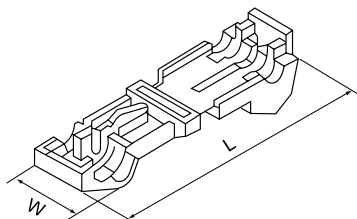



防水弹簧螺旋式接线头 WATERPROOF SCREW-ON WIRE CONNECTORS

热可塑性工程塑料成型外壳，UL94V-2 阻燃等级。

额定温度 105°C (221°F)。

弹簧式接线头，预先填充绝缘硅胶密封胶。

防水、防尘、防腐。

可使用于微湿、潮湿、掩埋和雨淋地点。

适用暴露于冷凝、水、蒸气或灰尘处的接线。

Thermal plasticity engineering plastic molding shell, UL94V-2 flame retardant grade.

Rated Temperature 105°C (221°F).

Spring connection head, prefilled with insulating silicone sealant.

Waterproof, dustproof, anticorrosive.

To be able to use in moist, wet, buried and rainy sites.

Suitable for wiring exposed to condensation, water, steam or dust.

型号 Item No.	颜色 Color	适用电线 Wire Range	额定电气规格 Electrical Ratings	包装单位 Packing
P4	橙色 (+ 黑色) Orange (+Black)	22-10AWG Max.2#12 w/2#14 w/2#16 Min.2#18	电压 Voltage: 600Volt Max. 温度 Temperature: 105°C(221°F)	50Pcs/bag 1,000Pcs/carton



防水双翼旋转端子 WATERPROOF WINGED WIRE CONNECTORS

热可塑性工程塑料成型外壳，UL94V-2 阻燃等级。

额定温度 105°C (221°F)。

弹簧式接线头，预先填充绝缘硅胶密封胶。

防水、防尘、防腐。

可使用于微湿、潮湿、掩埋和雨淋地点。

适用暴露于冷凝、水、蒸气或灰尘处的接线。

Thermal plasticity engineering plastic molding shell, UL94V-2 flame retardant grade.

Rated Temperature 105°C (221°F).

Spring connection head, prefilled with insulating silicone sealant.

Waterproof, dustproof, anticorrosive.

To be able to use in moist, wet, buried and rainy sites.

Suitable for wiring exposed to condensation, water, steam or dust.

型号 Item No.	颜色 Color	适用电线 Wire Range	额定电气规格 Electrical Ratings	包装单位 Packing
W2	象牙白 (+ 黑色) Ivory White (+Black)	18-8AWG Max.2#10 w/2#12 w/2#14 w/2#16 Min.2#18	电压 Voltage: 600Volt Max. 温度 Temperature: 105°C (221°F)	50Pcs/bag 1,000Pcs/carton
W3	红色 (+ 黑色) Red (+Black)	18-8AWG Max.2#8 w/2#10 w/2#12 w/2#14 w/2#16 Min.2#18		



螺旋式压线帽 SCREW ON WIRE CONNECTORS

胶壳：热可塑性工程塑料，UL94V-0 阻燃等级，绝缘佳不易老化


弹簧：高级钢材，坚韧牢靠

用途：适用于各种电器产品、家庭配线等接线器材，可重复使用，安全可靠

Plastic shell: thermoplastic engineering plastic, UL94V-0 flame retardant grade, good insulation is not easy to age

Spring: high grade steel, strong and reliable

Usage: Suitable for all kinds of electrical products, home wiring and other wiring equipment, reusable, safe and reliable



型号 Item No.	尺寸 Dimension (mm)			适用电线 Suitable Wire	颜色 Color
	H	W	D		
P71	15	8.7	6.5	MIN#20×1+22×1, MAX#16×2	灰 Grey 黄 Yellow
P72	18	10.0	7.5	MIN#20×3, MAX#16×2	蓝 Blue
P73	23	11.2	9.5	MIN#20×3, MAX#16×2+18×1	桔红 Orange
P74	24.2	13.6	10.8	MIN#14×1+18×1, MAX#14×4+18×1	黄 Yellow
P75	27.8	16.1	12.7	MIN#14×2, MAX#10×2+12×2	红 Red
P76	31	18	14	MIN#8, MAX#16	灰 Grey

双翼螺旋式压线帽 DOUBLE WINGS SCREW ON WIRE CONNECTORS

胶壳: 热可塑性工程塑料, UL94V-0 阻燃等级, 绝缘佳不易老化

弹簧: 高级钢材, 坚韧牢靠


用途: 适用于各种电器产品、家庭配线等接线器材, 可重复使用, 安全可靠

Plastic shell: thermoplastic engineering plastic, UL94V-0 flame retardant grade, good insulation is not easy to age

Spring: high grade steel, strong and reliable

Usage: Suitable for all kinds of electrical products, home wiring and other wiring equipment, reusable, safe and reliable

型号 Item No.	尺寸 Dimension (mm)			适用电线 Suitable Wire	颜色 Color
	H	W	D		
P1	22.0	19.0	9.8	MIN#18×2, MAX#12×3	黄 Yellow
P2	29.0	12.5	12.5	MIN#14×2, MAX#10×4	红 Red
P3	30.0	23.3	12.3	18-14	黄 Yellow
P4	32.4	25.4	14.2	18-10	红 Red
P7	38.4	31.8	17.5	12-8	蓝 Blue



安全型压线帽 SAFETY-TYPE WIRE JOINTS

外壳材质: UL 认可之尼龙 66, 防火等级 94V-2。

使用方法: 将电线尾部外皮剥去再插入套管内, 用压线钳压紧即可。


特点: 外壳为尼龙注塑成型、内部铜管特长, 增加电线压接范围使其更易于导电, 并更能夹住电缆, 即使强烈振动亦不脱落。

Shell material: Nylon 66, 94V-2, certificated agree, by UL.


Usage: Peel the coat of wire, then insert to tube, use pincers to fix them.

Feature: Nylon shell, long copper tube, easy to conduct electricity and hold wire tightly.

型号 Item No.	尺寸 Dimension (mm)				适用电线范围 Suitable Wire	
	A(高)	W(宽)B	W(宽)C	铜管内径 D	mm ²	AWG
FT-ø3	18	9	3.6	2.8	1.25	22-16
FT-ø4	21	9.5	3.9	3	2	16-14
FT-ø5	22.5	10.5	4.8	4	5.5	12-10
FT-ø6	24	12	5.6	4.8	8	8
FT-ø7	25.5	13	6.5	5.5	10	8-6
FT-ø8	25.5	14	7.5	6	13	6
FT-ø10	29.5	15.5	9.3	7.8	16	4



(FT-ø3-ø10)



(FT-A4-47.5)

闭端端子 CLOSED-END WIRE CONNECTORS

胶壳: 尼龙 66 工程塑料, UL94V-2 阻燃等级, 绝缘佳, 不易老化

特点: 共有 8 种型号, 适用于包含 22 号到 10 号 (AWG) 电线之各种线径组合

认证: 通过 UL_CQC 及 ROHS 认证, 并符合 CE 指令要求

用途: 适用于各种电器产品、灯饰及家庭配线等接线器材, 耐用且绝缘性能好


Plastic shell: Nylon 66 engineering plastics, UL 94V-2 flame retardant grade, good insulation, not easy aging

Features: There are 8 types, suitable for all kinds of wire combination including No.22 to No.10(AWG) wire

Certification: UL, CQC and ROHS certification, and CE instruction requirements

Application: Suitable for all kinds of electrical products. Wiring equipment such as lighting and home wiring, durable and good insulation performance

型号 Item No.		尺寸 Dimension (mm)			适用电缆 Wire Range	额定电气规格 Electrical Ratings
Brass	Aluminum	A	B	C		
CE1	CE1X	2.60	7.50	17.70	22-18AWG Max. 2#18w/2#20; Min. 2#22	Voltage: 300V Max. Temperature: 105°C (221°F)
CE2	CE2X	3.10	9.50	19.70	22-14AWG Max. 2#14w/2#16w/2#18w/2#20; Min. 2#22	
CE5	CE5X	4.40	12.00	25.00	22-10AWG Max. 2#12w/2#14w/2#16w/2#18w/2#20; Min. 2#22	
CE8	CE8X	5.30	14.80	27.30	16-10AWG Max. 2#10w/2#12; Min. 2#14	



叉形尼龙绝缘端头 NYLON FORK TERMINAL


材质: 紫铜
绝缘套管: 尼龙
耐温: 105°C 600V
Material: Copper
Insulation: Nylon
Temperature: 105°C 600V

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19A 材料厚度: 0.6mm
Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Curret: I_{max}=19A Thickness: 0.6mm



型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
SNY1.25-3	#4	3.2	5.6	6.5	22.2	11.0	4.3	红 Red
SNY1.25-3.5S	#6	3.7	5.6	6.5	22.2			
SNY1.25-3.5L	#6	3.7	6.4	6.5	22.2			
SNY1.25-4S	#8	4.3	6.4	6.5	22.2			
SNY1.25-4M	#8	4.3	7.2	6.5	22.2			
SNY1.25-4L	#8	4.3	8.1	6.5	22.2			
SNY1.25-5S	#10	5.3	8.1	6.5	22.2			
SNY1.25-5L	#10	5.3	9.6	6.5	22.2			
SNY1.25-6S	1/4	6.5	9.6	6.5	22.2			
SNY1.25-6L	1/4	6.5	12.0	11.0	28.2			
SNY1.25-8	5/16	8.5	14.0	12.5	30.2			

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27A 材料厚度: 0.65mm
Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Curret: I_{max}=27A Thickness: 0.65mm

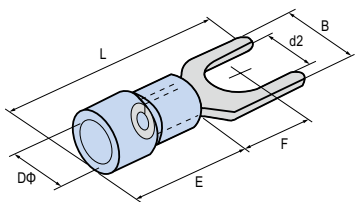

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
SNY2-3	#4	3.2	5.6	6.5	22.2	11.0	4.9	蓝 Blue
SNY2-3.5S	#6	3.7	5.6	6.5	22.2			
SNY2-3.5L	#6	3.7	6.4	6.5	22.2			
SNY2-4S	#8	4.3	6.4	6.5	22.2			
SNY2-4M	#8	4.3	7.2	6.5	22.2			
SNY2-4L	#8	4.3	8.1	6.5	22.2			
SNY2-5S	#10	5.3	8.1	6.5	22.2			
SNY2-5L	#10	5.3	9.5	6.5	22.2			
SNY2-6S	1/4	6.5	9.5	6.5	22.2			
SNY2-6L	1/4	6.5	12.0	11.0	28.2			
SNY2-8	5/16	8.5	14.0	12.5	30.2			

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=48A 材料厚度: 0.8mm
Wire Range: 4-6mm²(A.W.G.12-10) Max Curret: I_{max}=48A Thickness: 0.8mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
SNY5.5-3.5	#6	3.7	7.3	7.5	26.5	14.0	6.7	黄 Yellow
SNY5.5-4S	#8	4.3	7.3	7.5	26.5			
SNY5.5-4L	#8	4.3	9.0	7.5	26.5			
SNY5.5-5	#10	5.3	9.0	7.5	26.5			
SNY5.5-6S	1/4	6.5	9.0	7.5	26.5			
SNY5.5-6L	1/4	6.5	11.8	12.0	32.5			
SNY5.5-8	5/16	8.5	14.0	11.5	31.5			

圆形尼龙绝缘端头 NYLON RING TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材质: 紫铜 材料厚度 : 0.6mmWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Material: Copper Thickness: 0.6mm


型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RNY1.25-3	#4	3.2	5.7	4.95	18.8	11.0	4.3	红 Red
RNY1.25-3.5S	#6	3.7	5.7	4.95	18.8			
RNY1.25-3.5M	#6	3.7	6.5	6.3	20.6			
RNY1.25-3.5L	#6	3.7	8.0	7.0	22.0			
RNY1.25-4S	#8	4.3	6.5	6.3	20.6			
RNY1.25-4L	#8	4.3	8.0	7.0	22.0			
RNY1.25-5S	#10	5.3	8.1	7.0	22.0			
RNY1.25-5L	#10	5.3	10.4	8.5	23.2			
RNY1.25-5LL	#10	5.3	11.6	11.1	28.0			
RNY1.25-6S	1/4	6.5	9.5	8.5	23.2			
RNY1.25-6L	1/4	6.5	11.6	11.1	28.0			
RNY1.25-8	5/16	8.5	11.7	11.1	28.0			
RNY1.25-10	3/8	10.5	13.8	13.9	31.7			
RNY1.25-10L	3/8	10.5	19.2	16.0	36.6			
RNY1.25-12	1/2	13.0	19.2	16.0	36.6			
RNY1.25-14	9/16	15.0	27.0	21.0	45.5			
RNY1.25-16	5/8	17.0	27.0	21.0	45.5			
RNY1.25-20	3/4	21.0	27.0	21.0	45.5			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材质: 紫铜 材料厚度 : 0.65mmWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Material: Copper Thickness: 0.65mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RNY2-3	#4	3.2	6.8	4.3	18.7	11.0	4.9	蓝 Blue
RNY2-3.5S	#6	3.7	6.7	4.3	18.7			
RNY2-3.5M	#6	3.7	7.5	6.3	20.7			
RNY2-3.5L	#6	3.7	8.6	7.4	22.7			
RNY2-4S	#8	4.3	6.7	6.3	20.7			
RNY2-4L	#8	4.3	8.6	7.4	22.7			
RNY2-5S	#10	5.3	8.6	7.4	22.7			
RNY2-5L	#10	5.3	9.3	7.4	23.2			
RNY2-6S	1/4	6.5	10.4	7.4	23.2			
RNY2-6L	1/4	6.5	12.0	11.0	28.0			
RNY2-8	5/16	8.5	11.7	11.0	28.0			
RNY2-10	3/8	10.5	13.8	13.9	31.7			
RNY2-10L	3/8	10.5	19.2	16.0	36.6			
RNY2-12	1/2	13.0	17.0	16.0	36.6			
RNY2-14	9/16	15.0	27.0	21.0	45.5			
RNY2-16	5/8	17.0	27.0	21.0	45.5			
RNY2-20	3/4	21.0	27.0	21.0	45.5			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材质: 紫铜 材料厚度 : 0.85mmWire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Material: Copper Thickness: 0.85mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2(mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RNY5.5-3.5	#6	3.7	7.3	6.1	23.7	14.0	6.7	黄 Yellow
RNY5.5-4S	#8	4.3	7.3	6.1	23.7			
RNY5.5-4L	#8	4.3	8.8	8.3	27.0			
RNY5.5-5	#10	5.3	8.8	8.3	27.0			
RNY5.5-6	1/4	6.5	11.2	10.5	30.5			
RNY5.5-6M	1/4	6.5	12.0	13.0	33.0			
RNY5.5-8	5/16	8.5	13.5	13.7	36.0			
RNY5.5-10	3/8	10.5	15.1	13.7	36.0			
RNY5.5-12	1/2	13.0	19.3	16.0	40.4			
RNY5.5-14	9/16	15.0	32.0	25.2	55.2			
RNY5.5-16	5/8	17.0	32.0	25.2	55.2	14.0	6.7	黄 Yellow
RNY5.5-20	3/4	21.0	32.0	25.2	55.2			



片形尼龙绝缘端头 NYLON BLADE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.6mm

Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.6mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
DBNY1.25-10	2.3	10.0	21.0	11.0	4.3	红 Red
DBNY1.25-11	3.0	11.0	22.0			
DBNY1.25-14S	2.4	14.0	25.0			
DBNY1.25-14L	3.0	14.0	25.0			
DBNY1.25-18	2.3	18.0	29.0			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.65mm

Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.65mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
DBNY2-9	2.8	9.0	20.0	11.0	4.9	蓝 Blue
DBNY2-10	2.8	10.0	21.0			
DBNY2-14S	2.4	14.0	25.0			
DBNY2-14L	3.0	14.0	25.0			
DBNY2-18	2.3	18.0	29.0			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.85mm

Wire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.85mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
DBNY5.5-10	2.8	10.0	25.0	14.0	6.9	黄 Yellow
DBNY5.5-14	4.5	14.0	29.0			
DBNY5.5-18	4.5	18.0	32.0			

公尼龙预绝缘接头 NYLON MALE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A

Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=10A

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	dØ	DØ	L	E	
MNY1.25-110(5)	0.5×2.8	0.4	2.8	1.7	3.8	18.7	11.0	红 Red
MNY1.25-110(8)	0.8×2.8	0.4	2.8	1.7	3.8	18.7		
MNY1.25-187(5)	0.5×4.75	0.4	4.75	1.7	3.8	21.0		
MNY1.25-187(8)	0.4×4.75	0.4×2	4.75	1.7	3.8	21.0		
MNY1.25-187(8L)	0.8×4.75	0.4	4.75	2.3	4.3	21.0		
MNY1.25-250	0.8×6.35	0.4×2	6.35	1.7	3.8	22.0		

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15A

Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=15A

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	dØ	DØ	L	E	
MNY2-110(5)	0.5×2.8	0.4	2.8	2.3	4.3	18.7	11.0	蓝 Blue
MNY2-110(8)	0.8×2.8	0.4	2.8	2.3	4.3	18.7		
MNY2-187(5)	0.5×4.75	0.4	4.75	2.3	4.3	21.0		
MNY2-187(8)	0.4×4.75	0.4×2	4.75	2.3	4.3	21.0		
MNY2-187(8L)	0.8×4.75	0.4	4.75	3.4	4.3	21.0		
MNY2-250	0.8×6.35	0.4×2	6.35	2.3	4.3	22.0		

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=24A

Wire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=24A

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	dØ	DØ	L	E	
MNY5.5-110(5)	0.5×2.8	0.4	2.8	3.4	5.7	21.0	13.0	黄 Yellow
MNY5.5-110(8)	0.8×2.8	0.4	2.8	3.4	5.7	21.0		
MNY5.5-187	0.5×4.75	0.4	4.75	3.4	5.7	23.0		
MNY5.5-250	0.8×6.35	0.4×2	6.35	3.4	5.7	24.0		

针形尼龙绝缘端头 NYLON PIN TERMINAL

材质: 紫铜

绝缘套管: 尼龙

耐温: 105°C 600V

Material: Copper

Insulation: Nylon

Temperature: 105°C 600V

导线截面: 0.5-1.5mm² (美国线规 22-16) 最大电流: I_{max}=19A 材料厚度: 0.6mmWire Range: 0.5-1.5mm² (A.W.G.22-16) Max Curret: I_{max}=19A Thickness: 0.6mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
PTNY1.25-9	1.9	9.0	20.0	11.0	4.3	红 Red
PTNY1.25-10	1.9	10.0	21.0			
PTNY1.25-12	1.9	12.0	23.0			
PTNY1.25-13	1.9	13.0	24.0			
PTNY1.25-18	1.9	18.0	29.0			

导线截面: 1.5-2.5mm² (美国线规 16-14) 最大电流: I_{max}=27A 材料厚度: 0.65mmWire Range: 1.5-2.5mm² (A.W.G.16-14) Max Curret: I_{max}=27A Thickness: 0.65mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
PTNY2-9	1.9	9.0	20.0	11.0	4.9	蓝 Blue
PTNY2-10	1.9	10.0	21.0			
PTNY2-12	1.9	12.0	23.0			
PTNY2-13	1.9	13.0	24.0			
PTNY2-18	1.9	18.0	29.0			

导线截面: 4-6mm² (美国线规 12-10) 最大电流: I_{max}=48A 材料厚度: 0.85mmWire Range: 4-6mm² (A.W.G.12-10) Max Curret: I_{max}=48A Thickness: 0.85mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
PTNY5.5-10	2.8	10.0	25.8	14.0	6.9	黄 Yellow
PTNY5.5-13	2.8	13.0	28.8			
PTNY5.5-18	2.8	18.0	32.8			

公尼龙全绝缘接头 NYLON MALE TERMINAL

材质: 黄铜


绝缘套管: 尼龙

耐温: 105°C 400V

Material: Brass

Insulation: Nylon

Temperature: 105°C 400V



型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)							颜色 Color
		W	F	L	B	DØ	CØ	T	
MDFN1.25-250	0.8×6.35	6.35	7.7	24.0	11.0	4.0	1.7	0.4	红 Red

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)							颜色 Color
		W	F	L	B	DØ	CØ	T	
MDFN2-250	0.8×6.35	6.35	7.7	24.0	11.0	4.0	2.3	0.4	蓝 Blue

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)							颜色 Color
		W	F	L	B	DØ	CØ	T	
MDFN5.5-250	0.8×6.35	6.35	7.7	25.0	13.0	6.3	3.4	0.4	黄 Yellow



旗形尼龙母绝缘接头 NYLON FLAG FEMALE TERMINAL

材质: 黄铜
绝缘套管: 尼龙
耐温: 105°C 400V
Material: Brass
Insulation: Nylon
Temperature: 105°C 400V

导线截面: 0.5-1.5mm² (美国线规 22-16) 最大电流: I_{max}=10A 材料厚度: 0.4mm
Wire Range: 0.5-1.5mm² (A.W.G.22-16) Max Current: I_{max}=10A Thickness: 0.4mm

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)				颜色 Color
		W	F	L	dØ	
FLDNY1.25-187(5)	0.5×4.75	5.0	7.0	15.0	1.7	红 Red
FLDNY1.25-187(8)	0.8×4.75	5.0	7.0	15.0	1.7	
FLDNY1.25-250	0.8×6.35	6.6	7.6	16.0	1.7	

导线截面: 1.5-2.5mm² (美国线规 16-14) 最大电流: I_{max}=15A 材料厚度: 0.4mm
Wire Range: 1.5-2.5mm² (A.W.G.16-14) Max Current: I_{max}=15A Thickness: 0.4mm

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)				颜色 Color
		W	F	L	dØ	
FLDNY2-187(5)	0.5×4.75	5.0	7.0	15.0	2.3	蓝 Blue
FLDNY2-187(8)	0.8×4.75	5.0	7.0	15.0	2.3	
FLDNY2-250	0.8×6.35	6.6	7.6	16.0	2.3	
FLDNY2-250L	0.8×6.35	6.6	7.6	17.0	2.3	

导线截面: 4-6mm² (美国线规 12-10) 材料厚度: 0.4mm
Wire Range: 4-6mm² (A.W.G.12-10) Thickness: 0.4mm

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)				颜色 Color
		W	F	L	dØ	
FLDNY5.5-250	0.8×6.35	7.0	7.6	17.5	3.4	黄 Yellow

肩背形公母尼龙绝缘端头

NYLON PIGGY BACK MALE FEMALE TERMINAL

导线截面: 0.5-1.5mm² (美国线规 22-16) 最大电流: I_{max}=10A
Wire Range: 0.5-1.5mm² (A.W.G.22-16) Max Current: I_{max}=10A

型号 Item No.	NEMA TAB (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	E	DØ	dØ	L	
PBNY1.25-250	0.8×6.35	6.6	6.35	11.0	3.8	1.7	23.0	红 Red

导线截面: 1.5-2.5mm² (美国线规 16-14) 最大电流: I_{max}=15A
Wire Range: 1.5-2.5mm² (A.W.G.16-14) Max Current: I_{max}=15A

型号 Item No.	NEMA TAB (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	E	DØ	dØ	L	
PBNY2-250	0.8×6.35	6.6	6.35	11.0	4.3	2.3	23.0	蓝 Blue

导线截面: 4-6mm² (美国线规 12-10) 最大电流: I_{max}=24A
Wire Range: 4-6mm² (A.W.G.12-10) Max Current: I_{max}=24A

型号 Item No.	NEMA TAB (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	E	DØ	dØ	L	
PBNY5.5-250	0.8×6.35	6.6	6.35	13.0	5.7	3.4	25.0	黄 Yellow

母尼龙预绝缘端头 NYLON FEMALE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10AWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Curret: I_{max}=10A

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
FNY1.25-110(5)	0.5×2.8	0.4	3.3	3.8	1.7	19.5	11.0	红 Red
FNY1.25-110(8)	0.8×2.8	0.4	3.3	3.8	1.7	19.5		
FNY1.25-187(5)	0.5×4.75	0.4	5.0	3.8	1.7	20.0		
FNY1.25-187(8)	0.8×4.75	0.4	5.0	3.8	1.7	20.0		
FNY1.25-205	0.5×5.2	0.4	5.7	3.8	1.7	20.0		
FNY1.25-250	0.8×6.35	0.4	6.6	3.8	1.7	20.8		
FNY1.25-312	0.8×8.0	0.4	8.2	3.8	1.7	24.0		

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15AWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Curret: I_{max}=15A


型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
FNY2-110(5)	0.5×2.8	0.4	3.3	4.3	2.3	19.5	11.0	蓝 Blue
FNY2-110(8)	0.8×2.8	0.4	3.3	4.3	2.3	19.5		
FNY2-187(5)	0.5×4.75	0.4	5.0	4.3	2.3	20.0		
FNY2-187(8)	0.8×4.75	0.4	5.0	4.3	2.3	20.0		
FNY2-205	0.5×5.2	0.4	5.7	4.3	2.3	20.0		
FNY2-250	0.8×6.35	0.4	6.6	4.3	2.3	20.0		
FNY2-312	0.8×8.0	0.4	8.2	4.3	2.3	24.7		
FNY2-375	1.2×9.4	0.4	9.9	4.3	2.3	28.6		

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=24AWire Range: 4-6mm²(A.W.G.12-10) Max Curret: I_{max}=24A

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
FNY5.5-110x5	0.5×2.8	0.4	3.3	5.7	3.4	22.0	13.0	黄 Yellow
FNY5.5-110x8	0.8×2.8	0.4	3.3	5.7	3.4	22.0		
FNY5.5-187x5	0.5×4.75	0.4	5.0	5.7	3.4	23.0		
FNY5.5-187x8	0.8×4.75	0.4	5.0	5.7	3.4	23.0		
FNY5.5-250	0.8×6.35	0.4	6.6	5.7	3.4	24.4		
FNY5.5-312	0.8×8.0	0.4	8.2	5.7	3.4	28.3		
FNY5.5-375	1.2×9.4	0.4	9.9	5.7	3.4	30.6		

子弹型公、母全绝缘接头 (尼龙)


BULLET SHAPED MALE AND FEMALE FULL-INSULATING JOINT (NYLON)

最大电流 : I_{max}=19A 材质 : 黄铜 绝缘套材料 : 尼龙Max Curret: I_{max}=19A Material: Brass Insulator material: Nylon

型号 Item No.	导线面积 Line SQ.		尺寸 Dimension (mm)							颜色 Color
	A.W.G.	mm ²	B	b	D	d	L	F	H	
FRFNY1.25-156	22-16	0.5-1.5	6.9	3.9	3.2	1.8	26.0	15.0	11.0	红 Red
MPFNY1.25-156	22-16	0.5-1.5	7.4	4.0	3.2	1.8	27.5	16.5	11.0	红 Red
FRFNY2-156	16-14	1.5-2.5	6.9	3.9	3.9	2.4	26.0	15.0	11.0	蓝 Blue
MPFNY2-156	16-14	1.5-2.5	7.4	4.0	3.9	2.4	27.5	16.5	11.0	蓝 Blue

母尼龙全绝缘接头 NYLON FEMALE TERMINAL

材质: 黄铜
绝缘套管: 尼龙
耐温: 105°C 400V
Material: Brass
Insulation: Nylon
Temperature: 105°C 400V



型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)						颜色 Color
		W	F	L	B	DØ	CØ	
FDFN1.25-110(5)	0.5×2.8	4.3	8.0	18.8	11.0	4.0	1.7	紫 purple
FDFN1.25-110(8)	0.8×2.8	4.3	8.0	18.8	11.0	4.0	1.7	

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)						颜色 Color
		W	F	L	B	DØ	CØ	
FDFN1.25-187(5)	0.5×4.75	5.8	9.5	20.5	11.0	4.0	1.7	红 Red
FDFN1.25-187(8)	0.8×4.75	5.8	9.5	20.5	11.0	4.0	1.7	
FDFN1.25-250	0.8×6.35	8.4	10.5	22.6	11.0	4.0	1.7	

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)						颜色 Color
		W	F	L	B	DØ	CØ	
FDFN2-187(5)	0.5×4.75	6.2	9.5	20.7	11.0	4.5	2.3	蓝 Blue
FDFN2-187(8)	0.8×4.75	6.2	9.5	20.7	11.0	4.5	2.3	
FDFN2-250	0.8×6.35	8.4	10.5	22.6	11.0	4.5	2.3	

型号 Item No.	接插规格 Plug Specifications	尺寸 Dimension (mm)						颜色 Color
		W	F	L	B	DØ	CØ	
FDFN5.5-250	0.8×6.35	8.6	10.5	24.0	13	6.3	3.4	黄 Yellow

子弹形公、母尼龙全绝缘端头 NYLON FULL-INSULATING BULLET MALE FEMALE TERMINAL

材质: 黄铜
绝缘套管: 尼龙
耐温: 105°C 400V
Material: Brass
Insulation: Nylon
Temperature: 105°C 400V

导线截面: 0.5-1.5mm²(美国线规 22-16)
Wire Range: 0.5-1.5mm²(A.W.G.22-16)

型号 Item No.	尺寸 Dimension (mm)							颜色 Color
	BØ	bØ	DØ	dØ	L	F	E	
FRFNY1.25-156	6.3	3.9	4.0	1.7	24.3	13.3	11.0	红 Red
MRFNY1.25-156	7.6	4.0	4.0	1.7	25.5	14.7	11.0	

导线截面: 1.5-2.5mm²(美国线规 16-14)
Wire Range: 1.5-2.5mm²(A.W.G.16-14)

型号 Item No.	尺寸 Dimension (mm)							颜色 Color
	BØ	bØ	DØ	dØ	L	F	E	
FRFNY2-156	6.3	3.9	4.5	2.3	24.3	13.3	11.0	蓝 Blue
MRFNY2-156	7.6	4.0	4.5	2.3	25.5	14.7	11.0	

导线截面: 4-6mm²(美国线规 12-10)
Wire Range: 4-6mm²(A.W.G.12-10)

型号 Item No.	尺寸 Dimension (mm)							颜色 Color
	BØ	bØ	DØ	dØ	L	F	E	
FRFNY5.5-195	6.8	4.9	6.3	3.4	27.0	13.3	13.0	黄 Yellow
MRFNY5.5-195	8.5	5.0	6.3	3.4	27.5	14.7	13.0	

长形全绝缘中间接头

NYLON MIDDLE CONNECTOR LONG TYPE

材质: 紫铜管

绝缘套管: 尼龙

耐温: 105°C 400V

Material: Copper tube

Insulation: Nylon

Temperature: 105°C 400V

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19AWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Curret: I_{max}=19A

型号 Item No.	尺寸 Dimension (mm)			颜色 Color
	L	dØ	DØ	
BNY1.25	27.5	1.7	3.3	红 Red

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27AWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Curret: I_{max}=27A

型号 Item No.	尺寸 Dimension (mm)			颜色 Color
	L	dØ	DØ	
BNY2	27.5	2.3	3.9	蓝 Blue

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=48AWire Range: 4-6mm²(A.W.G.12-10) Max Curret: I_{max}=48A

型号 Item No.	尺寸 Dimension (mm)			颜色 Color
	L	dØ	DØ	
BNY5.5	27.5	3.4	5.4	黄 Yellow

导线截面: 0.5-1.5mm²(美国线规 22-16) 最大电流: I_{max}=19AWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Curret: I_{max}=19A


型号 Item No.	尺寸 Dimension (mm)			颜色 Color
	L	dØ	DØ	
BNYF1.25	24.7	1.7	3.8	红 Red

导线截面: 1.5-2.5mm²(美国线规 16-14) 最大电流: I_{max}=27AWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Curret: I_{max}=27A

型号 Item No.	尺寸 Dimension (mm)			颜色 Color
	L	dØ	DØ	
BNYF2	24.7	2.3	4.7	蓝 Blue

导线截面: 4-6mm²(美国线规 12-10) 最大电流: I_{max}=48AWire Range: 4-6mm²(A.W.G.12-10) Max Curret: I_{max}=48A

型号 Item No.	尺寸 Dimension (mm)			颜色 Color
	L	dØ	DØ	
BNYF5.5	27.3	3.4	6.5	黄 Yellow



BHT 防水热缩中接端子 HEAT SHRINKABLE BUTT CONNECTER

应用 Application

BHT 是由聚烯烃生而成的热收缩套管涂胶而成，用于保护连接、防水防腐蝕，可以在粗糙的环境中加强固定和防震动，具有很好的绝缘保护电子连接器的功能。与常规的连接端子相比，具有耐久性、易于安装、安装成本低的优势。

BHT protects splices from water and corrosion. Providing strain relief and against vibration in rugged environments, which excellently insulates and protects electronic connections. It offer long-term performance, easy installation, and a low installed cost, which is more reliable than conventional crimp terminals.

特性 Characteristics

- 收缩率 3: 1
- Polyamide 热熔胶提高优异的防水性能
- 材料优异的延伸性能，抗机械损害
- 透明度佳，提高更好的抗拉力
- 高弹性，管材不易变形
- Shrinkage ratio 3:1
- Polyamide hot-melt adhesive provides excellent waterproof property
- Excellent stretch and mechanical damage resistance
- Ideally translucent provides tensile strength
- High elasticity keeps steady performance

操作温度 Operating temperature range

- 操作温度：-55°C~125°C
- 开始收缩温度：80°C
- 最低完全收缩温度：130°C

Operating temperature: -55°C~125°C
Minimum shrink temperature: 80°C
Fully recovery temperature: 130°C

性能参数 Technical Indicators

Test Item		Characteristics	Test condition
Unaged	Tensile strength	Min. 16Mpa	Room temp
	Elongation	Min. 200%	
Aged	Tensile strength	Min. 11.5Mpa	158°C/7 days
	Elongation	Min. 100%	
Voltage withstand and breakdown Voltage(Unaged)		Withstand 2.5 KV for 1 minute and breakdown	Room temp
Voltage withstand and breakdown Voltage(Aged)		Withstand 2.5 KV for 1 minute and breakdown at least half of unaged breakdown voltage	158°C/7 days
Copper corrosion		No corrosion of bare copper	158°C/7 days
Maximum secant modulus(2%)		No sign of degradation Min. Elongation 100%	158°C/7 days
Copper stability		No crack	-30°C/4 hrs
Cold bend		250Mpa	-
Volume resistivity		Min. $10^{14}\Omega\cdot\text{cm}$	-
Heat shock		No crack	250°C/4 hrs

材质：紫铜

Material: Copper

热缩管材质：PE

Heat shrinkable tube material: PE

符合：RoHS

Approval: RoHS

导线截面：0.3-0.5mm² (美国线规 20-22) 铜管厚度：0.8 mm

Wire Range: 0.3-0.5mm² (A.W.G.20-22) Thickness of copper tube: 0.8 mm

型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	B	L2	W	L1	
BHT-1.25	1.7	15	4.8	36.5	红 Red

导线截面：1.5-2.5mm² (美国线规 16-14) 铜管厚度：0.8 mm

Wire Range: 1.5-2.5mm² (A.W.G.16-14) Thickness of copper tube: 0.8 mm

型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	B	L2	W	L1	
BHT-2.5	2.4	15	5.8	36.5	蓝 Blue

导线截面：0.3-0.5mm², 4-6mm² (美国线规 20-22, 12-10) 铜管厚度：1.0 mm

Wire Range: 0.3-0.5mm², 4-6mm² (A.W.G.20-22, 12-10) Thickness of copper tube: 1.0 mm

型号 Item No.	尺寸 Dimension (mm)				颜色 Color
	B	L2	W	L1	
BHT-0.5	1.0	12	3.0	26	黄 Yellow
BHT-5.5	3.6	15	6.8	41.5	

叉形热缩防水端头 (TU 型) Heat Shrinkable Fork Terminal

材质: 紫铜

操作温度: -55°C~125°C

开始收缩温度: 80°C

最低完全收缩温度: 130°C

Material: Copper

Operating temperature: -55°C~125°C

Began to shrink temperature: 80°C

Minimum complete shrinkage temperature: 130°C

导线截面: 0.5-1.5mm² (美国线规 22-16) 最大电流: I_{max}=19A 材料厚度: 0.6mmWire Range: 0.5-1.5mm² (A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.6mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RSSV1.25-3	#4	3.2	5.6	6.5	30.0	19.0	4.8	红 Red
RSSV1.25-3.5S	#6	3.7	5.6	6.5	30.0			
RSSV1.25-3.5L	#6	3.7	6.4	6.5	30.0			
RSSV1.25-4S	#8	4.3	6.4	6.5	30.0			
RSSV1.25-4M	#8	4.3	7.2	6.5	30.0			
RSSV1.25-4L	#8	4.3	8.1	6.5	30.0			
RSSV1.25-5S	#10	5.3	8.1	6.5	30.0			
RSSV1.25-5L	#10	5.3	9.6	6.5	30.0			
RSSV1.25-6S	1/4	6.5	9.6	6.5	30.0			
RSSV1.25-6L	1/4	6.5	12.0	11.0	36.0			
RSSV1.25-8	5/16	8.5	14.0	12.5	38.0			

导线截面: 1.5-2.5mm² (美国线规 16-14) 最大电流: I_{max}=27A 材料厚度: 0.65mmWire Range: 1.5-2.5mm² (A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.65mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RSSV2-3	#4	3.2	5.6	6.5	30.0	19.0	5.8	蓝 Blue
RSSV2-3.5S	#6	3.7	5.6	6.5	30.0			
RSSV2-3.5L	#6	3.7	6.4	6.5	30.0			
RSSV2-4S	#8	4.3	6.4	6.5	30.0			
RSSV2-4M	#8	4.3	7.2	6.5	30.0			
RSSV2-4L	#8	4.3	8.1	6.5	30.0			
RSSV2-5S	#10	5.3	8.1	6.5	30.0			
RSSV2-5L	#10	5.3	9.5	6.5	30.0			
RSSV2-6S	1/4	6.5	9.5	6.5	30.0			
RSSV2-6L	1/4	6.5	12.0	11.0	36.0			
RSSV2-8	5/16	8.5	14.0	12.5	38.0			

导线截面: 4-6mm² (美国线规 12-10) 最大电流: I_{max}=48A 材料厚度: 0.85mmWire Range: 4-6mm² (A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.85mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RSSV5.5-3.5	#6	3.7	7.3	7.5	34.3	22.0	6.8	黄 Yellow
RSSV5.5-4S	#8	4.3	7.3	7.5	34.3			
RSSV5.5-4L	#8	4.3	9.0	7.5	34.3			
RSSV5.5-5	#10	5.3	9.0	7.5	34.3			
RSSV5.5-6S	1/4	6.5	9.0	7.5	34.3			
RSSV5.5-6L	1/4	6.5	11.8	12.0	40.3			
RSSV5.5-8	5/16	8.5	14.0	11.5	39.3			



圆形热缩防水端头 HEAT SHRINKABLE RING TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.6mm

Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Curret: I_{max}=19A Thickness: 0.6mm



型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RSRV1.25-3	#4	3.2	5.7	4.95	26.6	19.0	4.8	红 Red
RSRV1.25-3.5S	#6	3.7	5.7	4.95	26.6			
RSRV1.25-3.5M	#6	3.7	6.5	6.3	28.4			
RSRV1.25-3.5L	#6	3.7	8.0	7.0	29.8			
RSRV1.25-4S	#8	4.3	6.5	6.3	28.4			
RSRV1.25-4L	#8	4.3	8.0	7.0	29.8			
RSRV1.25-5S	#10	5.3	8.1	7.0	29.8			
RSRV1.25-5L	#10	5.3	9.5	8.5	31.0			
RSRV1.25-5LL	#10	5.3	10.4	11.1	35.8			
RSRV1.25-6S	1/4	6.5	10.4	8.5	31.0			
RSRV1.25-6L	1/4	6.5	11.7	11.1	35.8			
RSRV1.25-8	5/16	8.5	11.7	11.1	35.8			
RSRV1.25-10	3/8	10.5	13.8	13.9	39.5			
RSRV1.25-10L	3/8	10.5	18.1	16.0	44.4			
RSRV1.25-12	1/2	13.0	18.1	16.0	44.4			
RSRV1.25-14	9/16	15.0	27.0	21.0	53.3			
RSRV1.25-16	5/8	17.0	27.0	21.0	53.3			
RSRV1.25-20	3/4	21.0	27.0	21.0	53.3			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.65mm

Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Curret: I_{max}=27A Thickness: 0.65mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RSRV2-3	#4	3.2	6.8	4.3	26.5	19.0	5.8	蓝 Blue
RSRV2-3.5S	#6	3.7	6.7	4.3	26.5			
RSRV2-3.5M	#6	3.7	7.5	6.3	28.5			
RSRV2-3.5L	#6	3.7	8.6	7.4	30.5			
RSRV2-4S	#8	4.3	6.7	6.3	28.5			
RSRV2-4L	#8	4.3	8.6	7.4	30.5			
RSRV2-5S	#10	5.3	8.6	7.4	30.5			
RSRV2-5L	#10	5.3	9.3	7.4	31.0			
RSRV2-6S	1/4	6.5	10.4	7.4	31.0			
RSRV2-6L	1/4	6.5	11.7	11.0	35.8			
RSRV2-8	5/16	8.5	11.7	11.0	35.8			
RSRV2-10	3/8	10.5	13.8	13.9	39.5			
RSRV2-10L	3/8	10.5	17.0	16.0	44.4			
RSRV2-12	1/2	13.0	17.0	16.0	44.4			
RSRV2-14	9/16	15.0	27.0	21.0	53.3			
RSRV2-16	5/8	17.0	27.0	21.0	53.3			
RSRV2-20	3/4	21.0	27.0	21.0	53.3			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.85mm

Wire Range: 4-6mm²(A.W.G.12-10) Max Curret: I_{max}=48A Thickness: 0.85mm

型号 Item No.	美制螺栓号 USA Bolt No.	螺栓口直径 Bolt Dia.d2 (mm)	尺寸 Dimension (mm)					颜色 Color
			B	F	L	E	DØ	
RSRV5.5-3.5	#6	3.7	7.3	6.1	31.5	22.0	6.8	黄 Yellow
RSRV5.5-4S	#8	4.3	7.3	6.1	31.5			
RSRV5.5-4L	#8	4.3	8.8	8.3	34.8			
RSRV5.5-5	#10	5.3	8.8	8.3	34.8			
RSRV5.5-6	1/4	6.5	11.2	10.5	38.3			
RSRV5.5-6M	1/4	6.5	13.5	13.0	40.8			
RSRV5.5-8	5/16	8.5	13.5	13.7	43.8			
RSRV5.5-10	3/8	10.5	15.1	13.7	43.8			
RSRV5.5-12	1/2	13.0	19.3	16.0	48.2			
RSRV5.5-14	9/16	15.0	32.0	25.2	63.0			
RSRV5.5-16	5/8	17.0	32.0	25.2	63.0			
RSRV5.5-20	3/4	21.0	32.0	25.2	63.0			

片形热缩防水端头 HEAT SHRINKABLE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.6mmWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.6mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
RSDB1.25-10	2.3	10.0	28.8	19.0	4.8	红 Red
RSDB1.25-11	3.0	11.0	29.8			
RSDB1.25-14S	2.4	14.0	32.8			
RSDB1.25-14L	3.0	14.0	32.8			
RSDB1.25-18	2.3	18.0	36.8			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.65mmWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.65mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
RSDB2-9	2.8	9.0	27.8	19.0	5.8	蓝 Blue
RSDB2-10	2.8	10.0	28.8			
RSDB2-14S	2.4	14.0	32.8			
RSDB2-14L	3.0	14.0	32.8			
RSDB2-18	2.3	18.0	36.8			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.85mmWire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.85mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
RSDB5.5-10	2.8	10.0	32.8	22.0	6.8	黄 Yellow
RSDB5.5-14	4.5	14.0	36.8			
RSDB5.5-18	4.5	18.0	39.8			

针形热缩防水端头 HEAT SHRINKABLE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.6mmWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.6mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
RSPT1.25-9	1.9	9.0	27.8	19.0	4.8	红 Red
RSPT1.25-10	1.9	10.0	28.8			
RSPT1.25-12	1.9	12.0	30.8			
RSPT1.25-13	1.9	13.0	31.8			
RSPT1.25-18	1.9	18.0	36.8			

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.65mmWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.65mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
RSPT2-9	1.9	9.0	27.8	19.0	5.8	蓝 Blue
RSPT2-10	1.9	10.0	28.8			
RSPT2-12	1.9	12.0	30.8			
RSPT2-13	1.9	13.0	31.8			
RSPT2-18	1.9	18.0	36.8			

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.85mmWire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.85mm

型号 Item No.	尺寸 Dimension (mm)					颜色 Color
	B	F	L	E	DØ	
RSPT5.5-10	2.8	10.0	33.6	22.0	6.8	黄 Yellow
RSPT5.5-13	2.8	13.0	36.6			
RSPT5.5-18	2.8	18.0	40.6			



肩背形热缩防水端头

HEAT SHRINKABLE PIGGY BACK TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=10A

Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=10A



型号 Item No.	NEMA TAB (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	E	DØ	dØ	L	
RSPB1.25-250	0.8×6.35	6.6	6.35	11.0	4.8	1.7	30.8	红 Red

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=15A

Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=15A



型号 Item No.	NEMA TAB (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	E	DØ	dØ	L	
RSPB2-250	0.8×6.35	6.6	6.35	11.0	5.8	2.3	30.8	蓝 Blue

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=24A

Wire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=24A



型号 Item No.	NEMA TAB (mm)	尺寸 Dimension (mm)						颜色 Color
		B	B1	E	DØ	dØ	L	
RSPB5.5-250	0.8×6.35	6.6	6.35	13.0	6.8	3.4	32.8	黄 Yellow

母全绝缘热缩防水接头

HEAT SHRINKABLE FULL-INSULATING FEMALE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.4mm

Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.4mm



型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
RSFF1.25-110(5)	0.5×2.8	0.4	3.3	4.8	1.7	26.0	17.0	红 Red
RSFF1.25-110(8)	0.8×2.8	0.4	3.3	4.8	1.7	26.0		
RSFF1.25-187(5)	0.5×4.75	0.4	5.0	4.8	1.7	26.0		
RSFF1.25-187(8)	0.8×4.75	0.4	5.0	4.8	1.7	26.0		
RSFF1.25-250	0.8×6.35	0.4	6.6	6.0	1.7	28.0		

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.4mm

Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.4mm



型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
RSFF2-110(5)	0.5×2.8	0.4	3.3	5.8	2.3	26.0	17.0	蓝 Blue
RSFF2-110(8)	0.8×2.8	0.4	3.3	5.8	2.3	26.0		
RSFF2-187(5)	0.8×4.75	0.4	5.0	5.8	2.3	26.0		
RSFF2-187(8)	0.8×4.75	0.4	5.0	5.8	2.3	26.0		
RSFF2-250	0.8×6.35	0.4	6.6	8.0	2.3	28.0		

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.4mm

Wire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.4mm



型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
RSFF5.5-110x5	0.5×2.8	0.4	3.3	7.0	3.4	26.0	19.0	黄 Yellow
RSFF5.5-110x8	0.8×2.8	0.4	3.3	7.0	3.4	26.0		
RSFF5.5-187x5	0.5×4.75	0.4	5.0	7.0	3.4	26.0		
RSFF5.5-187x8	0.8×4.75	0.4	5.0	7.0	3.4	26.0		
RSFF5.5-250	0.8×6.35	0.4	6.6	8.5	3.4	28.0		
RSFF5.5-312	0.8×8.0	0.4	8.2	10.5	3.4	30.0		
RSFF5.5-375	1.2×9.4	0.4	9.9	10.5	3.4	30.0		

母热缩防水端头

HEAT SHRINKABLE FEMALE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.4mmWire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.4mm

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
RSFD1.25-110(5)	0.5×2.8	0.4	3.3	4.8	1.7	27.3	19.0	红 Red
RSFD1.25-110(8)	0.8×2.8	0.4	3.3	4.8	1.7	27.3		
RSFD1.25-187(5)	0.5×4.75	0.4	5.0	4.8	1.7	27.8		
RSFD1.25-187(8)	0.8×4.75	0.4	5.0	4.8	1.7	27.8		
RSFD1.25-205	0.5×5.2	0.4	5.7	4.8	1.7	27.8		
RSFD1.25-250	0.8×6.35	0.4	6.6	4.8	1.7	28.6		
RSFD1.25-312	0.8×8.0	0.4	8.2	4.8	1.7	31.8		

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.4mmWire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.4mm

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
RSFD2-110(5)	0.5×2.8	0.4	3.3	5.8	2.3	27.3	19.0	蓝 Blue
RSFD2-110(8)	0.8×2.8	0.4	3.3	5.8	2.3	27.3		
RSFD2-187(5)	0.5×4.75	0.4	5.0	5.8	2.3	27.8		
RSFD2-187(8)	0.8×4.75	0.4	5.0	5.8	2.3	27.8		
RSFD2-205	0.5×5.2	0.4	5.7	5.8	2.3	27.8		
RSFD2-250	0.8×6.35	0.4	6.6	5.8	2.3	27.8		
RSFD2-312	0.8×8.0	0.4	8.2	5.8	2.3	32.5		
RSFD2-375	1.2×9.4	0.4	9.9	5.8	2.3	36.4		

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.4mmWire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.4mm

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	DØ	dØ	L	E	
RSFD5.5-110×5	0.5×2.8	0.4	3.3	6.8	3.4	29.8	22.0	黄 Yellow
RSFD5.5-110×8	0.8×2.8	0.4	3.3	6.8	3.4	29.8		
RSFD5.5-187×5	0.5×4.75	0.4	5.0	6.8	3.4	30.8		
RSFD5.5-250×8	0.8×4.75	0.4	5.0	6.8	3.4	30.8		
RSFD5.5-250	0.8×6.35	0.4	6.6	6.8	3.4	32.2		
RSFD5.5-312	0.8×8.0	0.4	8.2	6.8	3.4	36.1		
RSFD5.5-375	1.2×9.4	0.4	9.9	6.8	3.4	38.4		

母子弹形热缩防水接头

HEAT SHRINKABLE BULLET FEMALE TERMINAL

最大电流 : I_{max}=10A Max Current: I_{max}=10A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
		B	F	DØ	E	L	
RSFR1.25-156	0.4	4.0	7.0	4.8	12.0	30.5	红 Red

最大电流 : I_{max}=15A Max Current: I_{max}=15A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
		B	F	DØ	E	L	
RSFR2-156	0.4	4.0	7.0	5.8	12.0	30.5	蓝 Blue
RSFR2-195	0.4	5.0	7.0	5.8	12.0	30.5	

最大电流 : I_{max}=24A Max Current: I_{max}=24A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
		B	F	DØ	E	L	
RSFR5.5-156	0.4	4.0	7.0	6.8	12.0	30.5	黄 Yellow
RSFR5.5-195	0.4	5.0	7.0	6.8	12.0	30.5	



公热缩防水接头

HEAT SHRINKABLE MALE TERMINAL

导线截面 : 0.5-1.5mm²(美国线规 22-16) 最大电流 : I_{max}=19A 材料厚度 : 0.4mm

Wire Range: 0.5-1.5mm²(A.W.G.22-16) Max Current: I_{max}=19A Thickness: 0.4mm

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	dØ	DØ	L	E	
RSMD1.25-110(5)	0.5×2.8	0.4	2.8	1.7	4.8	26.5	19.0	红 Red
RSMD1.25-110(8)	0.8×2.8	0.4	2.8	1.7	4.8	26.5		
RSMD1.25-187(5)	0.5×4.75	0.4	4.75	1.7	4.8	28.8		
RSMD1.25-187(8)	0.4×4.75	0.4×2	4.75	1.7	4.8	28.8		
RSMD1.25-187(8L)	0.8×4.75	0.4	4.75	2.3	4.8	28.8		
RSMD1.25-250	0.8×6.35	0.4×2	6.35	1.7	4.8	29.8		

导线截面 : 1.5-2.5mm²(美国线规 16-14) 最大电流 : I_{max}=27A 材料厚度 : 0.4mm

Wire Range: 1.5-2.5mm²(A.W.G.16-14) Max Current: I_{max}=27A Thickness: 0.4mm

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	dØ	DØ	L	E	
RSMD2-110(5)	0.5×2.8	0.4	2.8	2.3	5.8	26.5	19.0	蓝 Blue
RSMD2-110(8)	0.8×2.8	0.4	2.8	2.3	5.8	26.5		
RSMD2-187(5)	0.5×4.75	0.4	4.75	2.3	5.8	28.8		
RSMD2-187(8)	0.4×4.75	0.4×2	4.75	2.3	5.8	28.8		
RSMD2-187(8L)	0.8×4.75	0.4	4.75	3.4	5.8	28.8		
RSMD2-250	0.8×6.35	0.4×2	6.35	2.3	5.8	29.8		

导线截面 : 4-6mm²(美国线规 12-10) 最大电流 : I_{max}=48A 材料厚度 : 0.4mm

Wire Range: 4-6mm²(A.W.G.12-10) Max Current: I_{max}=48A Thickness: 0.4mm

型号 Item No.	NEMA TAB (mm)	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
			B	dØ	DØ	L	E	
RSMD5.5-110(5)	0.5×2.8	0.4	2.8	3.4	6.8	28.8	22.0	黄 Yellow
RSMD5.5-110(8)	0.8×2.8	0.4	2.8	3.4	6.8	28.8		
RSMD5.5-187	0.5×4.75	0.4	4.75	3.4	6.8	30.8		
RSMD5.5-250	0.8×6.35	0.4×2	6.35	3.4	6.8	31.8		

公子弹形热缩防水接头

HEAT SHRINKABLE BULLET MALE TERMINAL

最大电流 : I_{max}=10A Max Current: I_{max}=10A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
		B	F	DØ	E	L	
RSMP1.25-156	0.4	4.0	8.5	4.8	10.5	29.3	红 Red

最大电流 : I_{max}=15A Max Current: I_{max}=15A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
		B	F	DØ	E	L	
RSMP2-156	0.4	4.0	8.5	5.8	10.5	29.5	蓝 Blue
RSMP2-195	0.4	5.0	8.5	5.8	10.5	29.5	

最大电流 : I_{max}=24A Max Current: I_{max}=24A

型号 Item No.	材料厚度 Thickness (mm)	尺寸 Dimension (mm)					颜色 Color
		B	F	DØ	E	L	
RSMP5.5-156	0.4	4.0	8.5	6.8	13.0	31.8	黄 Yellow
RSMP5.5-195	0.4	5.0	8.5	6.8	13.0	31.8	

防水焊锡环热缩中接管 SST Solder Sleeve Wire Splices

应用
 专为导线连接、焊锡热缩保护、防水一次完成设计的产品。


特性
 收缩率：3:1
 含热熔胶具防水功能
 热熔胶颜色标示适用尺寸
 焊锡环设计容易施工

操作温度范围
 工作温度：-55℃~125℃
 开始收缩温度：60℃/125℃
 焊锡开始熔解温度：138℃
 焊锡完全熔解温度：160℃

Apply
 One piece design, it consists of transparent heat shrinkable sleeve and fluxed solder. Provides insulation, inspection, strain relief and waterproof. Makes insulation easy and lowers the installed cost. Color hot-melt glue on two ends of heat shrinkable tube, it's very convenience to use the exact wire dimension.

Characteristics
 Shrinkage ratio: 3:1
 Waterproof for wiring splices
 Easy control soldering process
 Transparent sleeve provides precise inspection


Operating temperature range
 Operating temperature: -55℃-125℃
 Minimum shrink temperature: 60℃/125℃
 Starting temperature of solder melt: 138℃
 Temperature of fully solder melt: 160℃

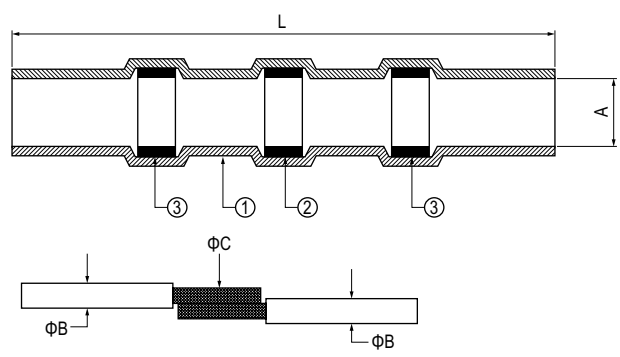

- ① 热收缩管 Heat shrinkable tubing
- ② 低温焊锡环 Low temperature solder sleeve
- ③ 防水热熔胶 Waterproof hot melt adhesive

型号 Item No.	Product Dimensions (mm)		Wire Dimensions (mm)			Cable Size	Standard Color
	A (min)	L (min)	B (min)	B and C (max)	C (min)	A.W.G (mm ²)	
SST-S11	1.7	26	1.0	1.7	0.76	26-24(0.25-0.34)	White
SST-S21	2.7	40	1.4	2.7	1.2	22-18(0.5-1.0)	Red
SST-S31	4.5	40	2.3	4.5	3.0	16-14(1.5-2.5)	Blue
SST-S41	6.0	40	3.7	6.0	3.4	12-10(4.0-6.0)	Yellow

窥口铜接端头 COPPER TUBE TERMINALS

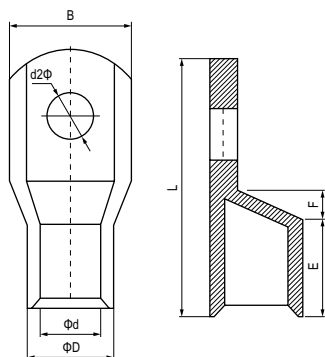

型号 Item No.	螺栓口直径 (mm) Screw DIA.D2	尺寸 Dimension (mm)						导线面积 Line SQ.
		dØ	DØ	B	F	E	L	
SC1.5-5	5.2	1.8	3.7	8.0	5	12	16	1.5
SC2.5-4	4.2	2.4	4.0	8.0	5	14	18	2.5
SC2.5-5	5.2			10.0	6	15	20	
SC4-5	5.2	3.1	4.8	10	6	15	20	4
SC4-6	6.5							
SC6-5	5.2	3.8	5.5	10	6	18	23	6
SC6-6	6.5			12	9	21		
SC10-6	6.5	4.5	6.2	12	7	19	25	10
SC10-8	2.4				9	21		
SC16-6	6.5	5.4	7.1	12	7	23	30	16
SC16-8	2.4					5		
SC25-6	6.5	6.8	8.8	13	7	23	33	25
SC25-8	2.4			18	10	17		
SC35-8	2.4	8.2	10.6	15.3	9	26	38	35
SC35-10	10.5			18	11	28		
SC50-8	2.4	9.5	12.4	17.8	11	33	45	50
SC50-10	10.5							
SC70-10	10.5	11.2	14.7	21.0	13	38	50	70
SC70-12	13.0							
SC95-10	10.5	13.5	17.4	25	13	42	55	95
SC95-12	13							
SC120-12	13	15	19.4	28	14	46	63	120
SC120-16	17				16	48		
SC150-12	13	16.5	21.2	30	16	53	70	150
SC150-16	17							
SC185-16	17	18.5	23.5	34	17	61	75	185
SC240-16	17	21	26.5	38	20	72	90	240
SC240-20	21							
SC300-16	17	23.5	30	43	22	79	98	300
SC300-20	21							
SC400-16	17	28.5	36.5	50.1	26	88	110	400
SC400-20	21							
SC500-16	17	30	39	56	28	96	120	500
SC500-20	21							
SC630-20	21	35	45	65	33	111	140	630
SC800-BL	-	39	50.6	73.5	-	-	170	800
SC1000-BL	-	43	56.2	61	-	-	200	1000

DTL 铜铝接线端子

COPPER-ALUMINIUM CONNECTING TERMINALS


产品应用 Application

DTL 铜铝接线端子适用于配电装置中各种圆型，半圆扇型铝线，电力电缆与电气设备铜端的过渡连接。使用铝材为 L3，铜材为 T2，产品采用摩擦焊工艺制造，具有焊缝强度高，通电性能好，抗电化腐蚀，使用寿命长等特点。

DTL series of copper-aluminium wiring terminals are suitable for transition connection of the circular aluminium wires, hemicycle-sector aluminium wires power supply cables in the distribution equipment and copper terminals of the electrical equipment. The material of aluminium and copper is that of L3 and T2 respectively. The technology of friction welding is wonderfully adopted. There fore they have distinguishing features of strong weld intensity, good nature in electrochemical, galvanic corrosion resistant and long service life.


选型尺寸 Product Dimensions

Model	Φ	D	d	L	L1
DTL-2-16	13	16	5.5	87	42
DTL-2-25	13	16	6.5	87	42
DTL-2-35	13	16	8	87	42
DTL-2-50	13	20	9	87	43
DTL-2-70	13	20	11	87	43
DTL-2-95	13	20	12.5	87	43
DTL-2-120	13	25	13.5	111	60
DTL-2-150	13	25	15.5	111	60
DTL-2-185	13	32	17.5	116	60
DTL-2-240	13	32	19.5	116	60
DTL-2-300	13	34	22.5	120	62



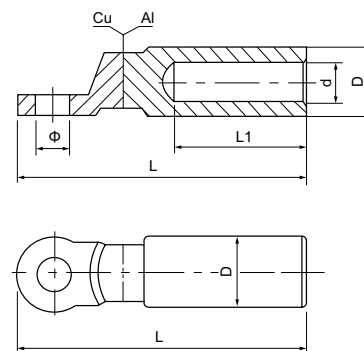


选型尺寸 Product Dimensions

Model	Φ	D	d	L	L1	B
DTL-1-10	8.5	10	6	68	28	16
DTL-1-16	8.5	11	6	70	30	16
DTL-1-25	8.5	12	7	75	34	18
DTL-1-35	10.5	14	8.5	85	38	20.5
DTL-1-50	10.5	16	9.8	90	40	23
DTL-1-70	12.5	18	11.5	102	48	26
DTL-1-95	12.5	21	13.5	112	50	28
DTL-1-120	14.5	23	15	120	53	30
DTL-1-150	14.5	25	16.5	126	56	34
DTL-1-185	16.5	27	18.5	133	58	37
DTL-1-240	16.5	30	21	140	60	40
DTL-1-300	21	34	23.5	160	65	50
DTL-1-400	21	38	27	170	70	50
DTL-1-500	21	47	29	225	75	60
DTL-1-630	-	54	35	245	80	80
DTL-1-800	-	60	38	270	90	100

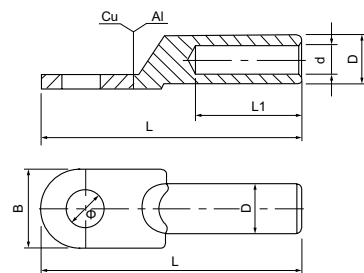


孔式系列 LOOP CONNECTOR TERMINAL




型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)					材料厚度 Thickness (mm)
			D	H	W	L	E	
Y3-2.5	Brass	0.5-2.5	3.2					0.6
DJ431-3A	Brass	0.5-0.8	3.5		9.0		17.0	0.5
DJ431-4B	Brass	0.5-0.8	4.5		10.0		17.0	0.5
DJ431-5A	Brass	0.5-0.8	5.2		10.0		17.0	0.5
DJ431-5C	Brass	2.0-2.5	5.5		10.0		17.0	0.5
DJ431-6A	Brass	0.5-0.8	6.2		12.0		17.0	0.5
DJ431-8B	Brass	1.0-1.5	8.2		15.0		17.0	0.8
DJ431-10B	Brass	1.0-1.5	10.5		19.0		19.0	0.8

叉型连接端子 FORK CONNECTOR TERMINAL




型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)					材料厚度 Thickness (mm)
			D	H	W	L	E	
DJ441A-3C	Brass	2.0-2.5	3.5		7.5	20.0	16.0	0.6
DJ441A-4B	Brass	1.0-1.5	4.5		8.5	20.0	16.0	0.6
DJ441A-4C	Brass	2.0-2.5	4.5		8.5	20.0	16.0	0.6
DJ441A-5B	Brass	1.0-1.5	5.5		9.5	20.0	16.0	0.6
DJ441A-6A	Brass	0.5-0.8	6.5		10.5	20.0	16.0	0.6
DJ441A-6B	Brass	1.0-1.5	6.5		10.5	20.0	16.0	0.6
DJ441A-6C	Brass	2.0-2.5	6.5		6.7	16.5	16.0	0.6

钳型连接端子 PINCER-LIKE CONNECTOR TERMINAL



型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)					材料厚度 Thickness (mm)
			D	H	W	L	E	
DJ441A-3A	Brass	0.5-0.8	3.2		8.0		16.5	0.6
DJ441A-5B	Brass	1.0-1.5	5.2		10.0		17.0	0.6
DJ441A-6A	Brass	0.5-0.8	6.2		11.5		17.0	0.6


圆柱系列 MALE CYLINDRICAL TYPE TERMINA

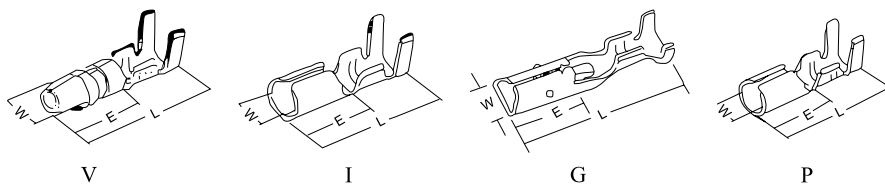

型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)					材料厚度 Thickness (mm)
			D	H	W	L	E	
DJ221-3.5B	Brass	1.0-1.5			3.5	15.0		0.5
DJ221-4B	Brass	1.0-1.5			4.0	16.0		0.5
DJ221-2.3B	Brass	1.0-1.5			3.9	19.0	7.4	0.3
DJ221-3.5B	Brass	1.0-1.5			3.3	17.6	6.5	0.3
DJ221-4B	Brass	1.0-1.5			3.8	17.6	6.5	0.4




插片系列 MALE FLAKE TERMINAL

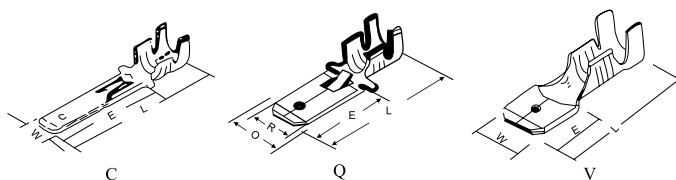

型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)					材料厚度 Thickness (mm)
			D	H	W	L	E	
DJ611-2.3×0.6B	Brass	1.0-1.5			2.3	27.0	9.6	0.3
DJ611-2.8×0.5B	Brass	0.5-0.8			2.8	21.0	12.0	0.5
DJ611-2.8×0.5B	Brass	1.0-1.5			2.8	21.0	12.0	0.5
DJ611-3×0.6	Brass	0.2-0.5			3.0	28.5		0.3
DJ611-2.8×0.5A	Brass	0.5-0.8						0.3
DJ611-4.8×0.8B	Brass	1.0-1.5	7.9		4.8	25.0	12.0	0.4
DJ611-6.3B	Brass	1.0-1.5			6.3	25.0	13.8	0.4
6.3C	Brass	1.0-1.5		0.8	6.3	25.0	8.0	0.5
2.8C	Brass	1.0-1.5		4.8	2.8	22.0	12.4	0.4
4.8C	Brass	1.0-1.5						0.4
DJ611-7.8×1.8B	Brass	1.0-1.5			7.8	31.0	16.4	0.4
DJ617-6.3B	Brass	1.0-1.5			6.3	19.2		0.4
DJ611-6.3B	Brass	0.5-0.8	7.9		6.3	25.0	13.8	0.4
DJ611-6.3A	Brass	1.0-1.5	7.9		7.8	13.4	13.8	0.4
DJ611-7.8×0.8B	Brass	1.0-1.5		0.8	7.8	31.0	16.4	0.4
DJ611-6.3	Brass	1.0-1.5		0.8	6.3	20.5	8.0	0.8
DJ611-6.3A	Brass							




插簧系列 FEMALE FLAKE TERMINAL



型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)			材料厚度 Thickness (mm)
			W	L	E	
DJ621-E2.8×0.5B	Brass	1.0-1.5	4.1	16.0	6.6	0.3
DJ621-B6.3B	Brass	1.0-1.5	6.3	22.5	6.5	0.4
DJ621-D2.8×0.5A	Brass	0.5-0.8	3.7	15.1	6.3	0.25
DJ621-E4.8×0.5A	Brass	0.5-0.8	6.0	13.8		0.3
DJ621-E6.3B	Brass	1.0-1.5	7.7	19.5	7.5	0.4
DJ621-E9.5	Brass					
DJ623-E6.3	Brass	1.0-1.5	7.7	19.5	7.5	0.35
DJ625-4.8×0.8A	Brass	0.5-0.8	6.4	12.0	6.2	0.4
DJ627-D6.3	Brass	1.0-1.5	7.7	19.5	7.5	0.35
DJ621-5A	Brass	0.5-0.8	5.2	17	5.5	0.3
DJ621-5B	Brass	1.0-1.5	5.2	17	5.5	0.3
DJ621-A6.3B	Brass	1.0-1.5	7.7	18.5	7.5	0.4
DJ621-E7.8	Brass					
DJ622-D6.3B	Brass	1.0-1.5	7.7	17.5	7.5	0.4
DJ621-D4.8	Brass					
DJ621-D5.2	Brass					
DJ621-2.8	Brass					
DJ621-6.3	Brass					



片式接插件插座 6.3 FEMALE FLAKE TERMINAL



型号 Item No.	材质 Metal	适用电线 Wire Range (mm ²)	尺寸 Dimension (mm)			材料厚度 Thickness (mm)
			W	L	E	
DJ6221-D6.3B	Brass	1.0-1.5	7.7	13.8	7.7	0.35

IT-175

175PCS 18 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
RV1.25-3	15	RV5.5-5	5	BV2	5
RV1.25-4	10	RV5.5-6	5	BV5.5	10
RV1.25-5	10	SV1.25-3	10	MDD1.25-250	10
RV2-3	15	SV1.25-4	10	MDD2-250	10
RV2-4	10	SV2-4	10	FDD1.25-250	10
RV2-5	10	BV1.25	10	FDD2-250	10

**IT-180**

180PCS 18 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
FRD2-195	10	RV5.5-4	5	BV5.5	5
FRD1-156	10	RV2-4	15	BV2	10
MPD2-195	10	SV1.25-4	15	BV1.25	10
MPD1-156	10	SV5.5-4	5	FDD2-250	10
MDD2-250	10	SV2-4	10	FDD1-250	10
MDD1-250	10	BV1.25	15	FDD1-110	10

**IT-300-1**

300PCS 18 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
RV1.25-3	25	RV5.5-5	5	BV2	10
RV1.25-4	25	RV5.5-6	5	BV5.5	10
RV1.25-5	25	SV1.25-3	20	MDD1.25-250	20
RV2-3	15	SV1.25-4	20	MDD2-250	20
RV2-4	20	SV2-4	20	FDD1.25-250	20
RV2-5	10	BV1.25	10	FDD2-250	20

**IT-300-2**

300PCS 12 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
FDD1.25-250	25	PBDD1.25-250	25	FRD1.25-156	25
FDD2-250	25	PBDD2-250	25	FRD2-156	25
MDD1.25-250	25	BV1.25	25	MPD1.25-156	25
MDD2-250	25	BV2	25	MPD2-156	25





IT-360

360PCS 18 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
MPD2-156	25	RV5.5-85	10	FRD2-156	10
RV2-5	30	RV2-6	20	RV2-10	20
RV5.5-5	20	RV5.5-6	15	RV5.5-10	15
BV1.25	30	BV2	30	BV5.5	15
SV2-5	30	MDD2-250	25	FDD2-250	25
SV5.5-5	20	FDFNY2-250	10	MDMNY2-250	10



IT-90

90 PCS 8 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
FDD2-250	10	MDD1-250	10	RV1.25-3.2	15
MDD2-250	10	BV2	10	SVS1.25-4	15
FDD1-250	10	BV1	10		



IT-1000

1000PCS 15 TYPE ASSORTNEBT

型号 Item No.	数量 QTY	型号 Item No.	数量 QTY	型号 Item No.	数量 QTY
RV1.25-3	80	FDD2-250	60	BV5.5	60
RV2-4	80	MDD1.25-250	60	3MR	20
SV1.25-3	80	MDD2-250	60	3MB	20
SV2-4	80	BV1.25	70	2.5 100 White	100
FDD1.25-250	60	BV2	70	2.5 100 Black	100